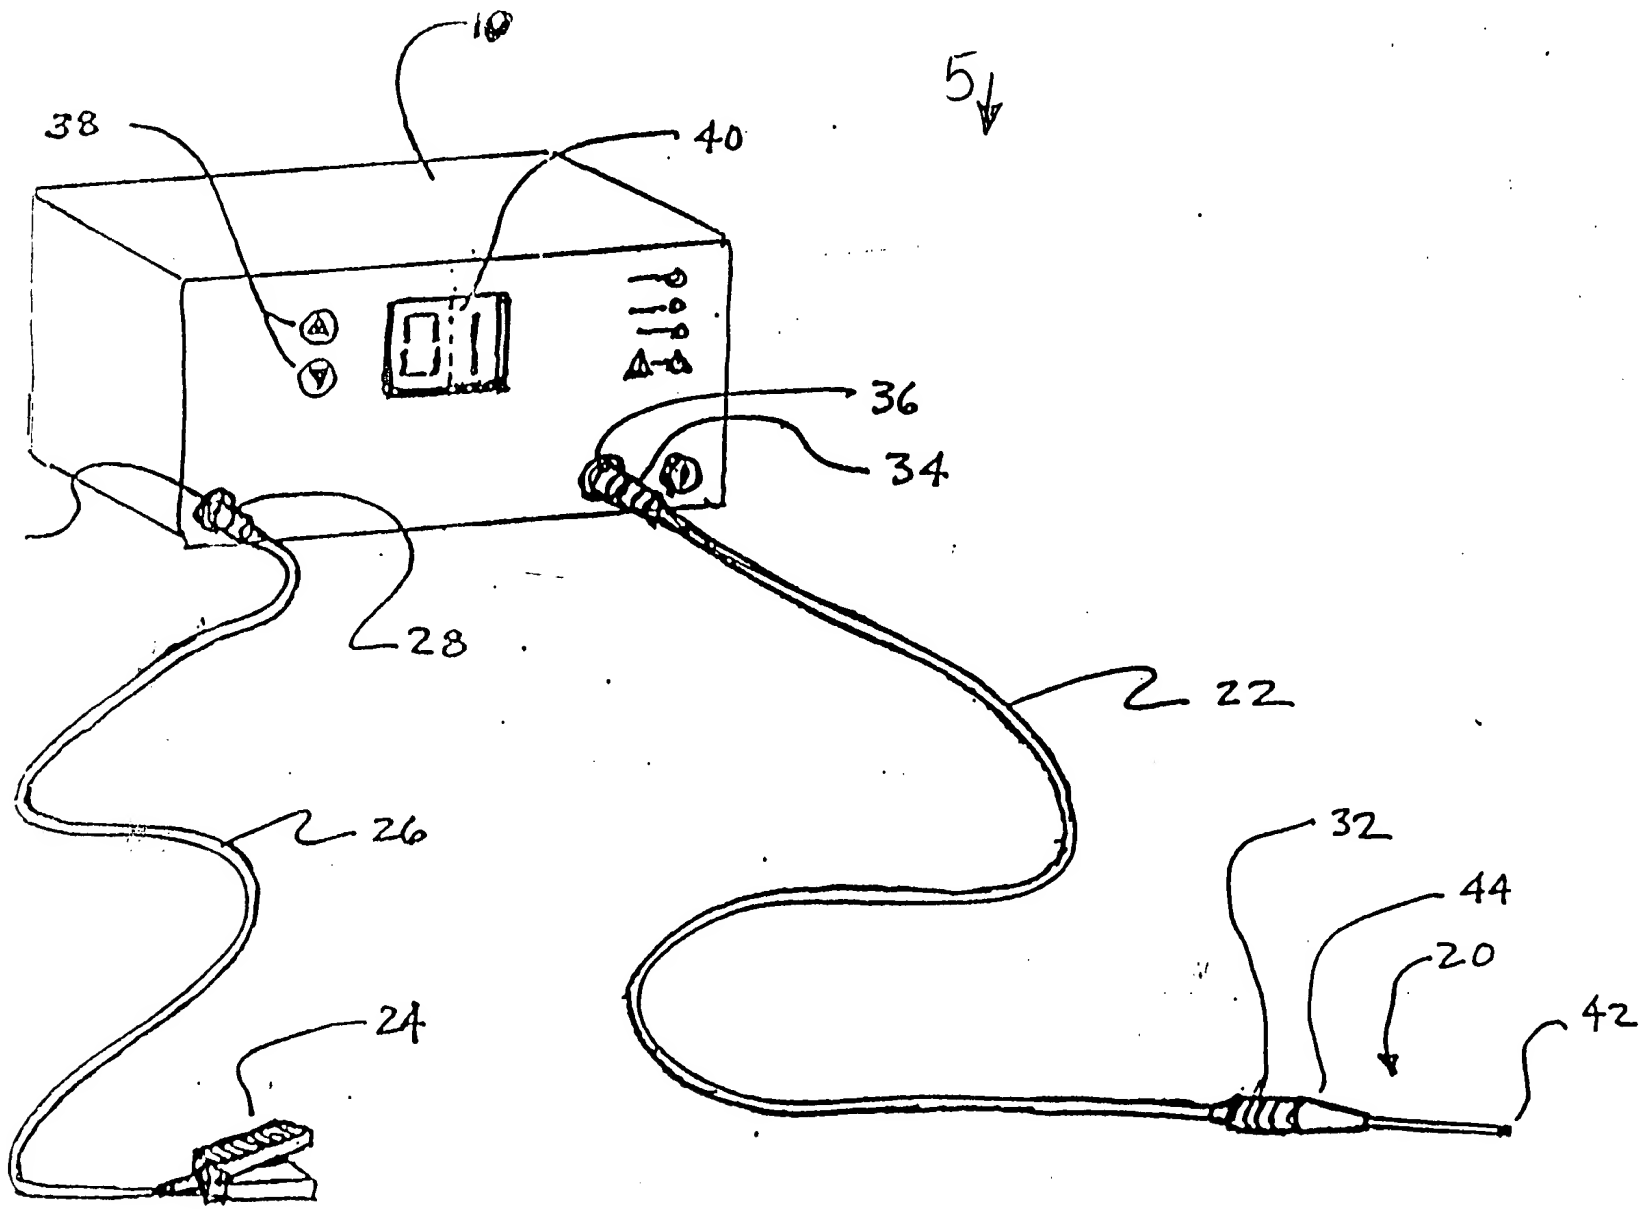

FIG. 1

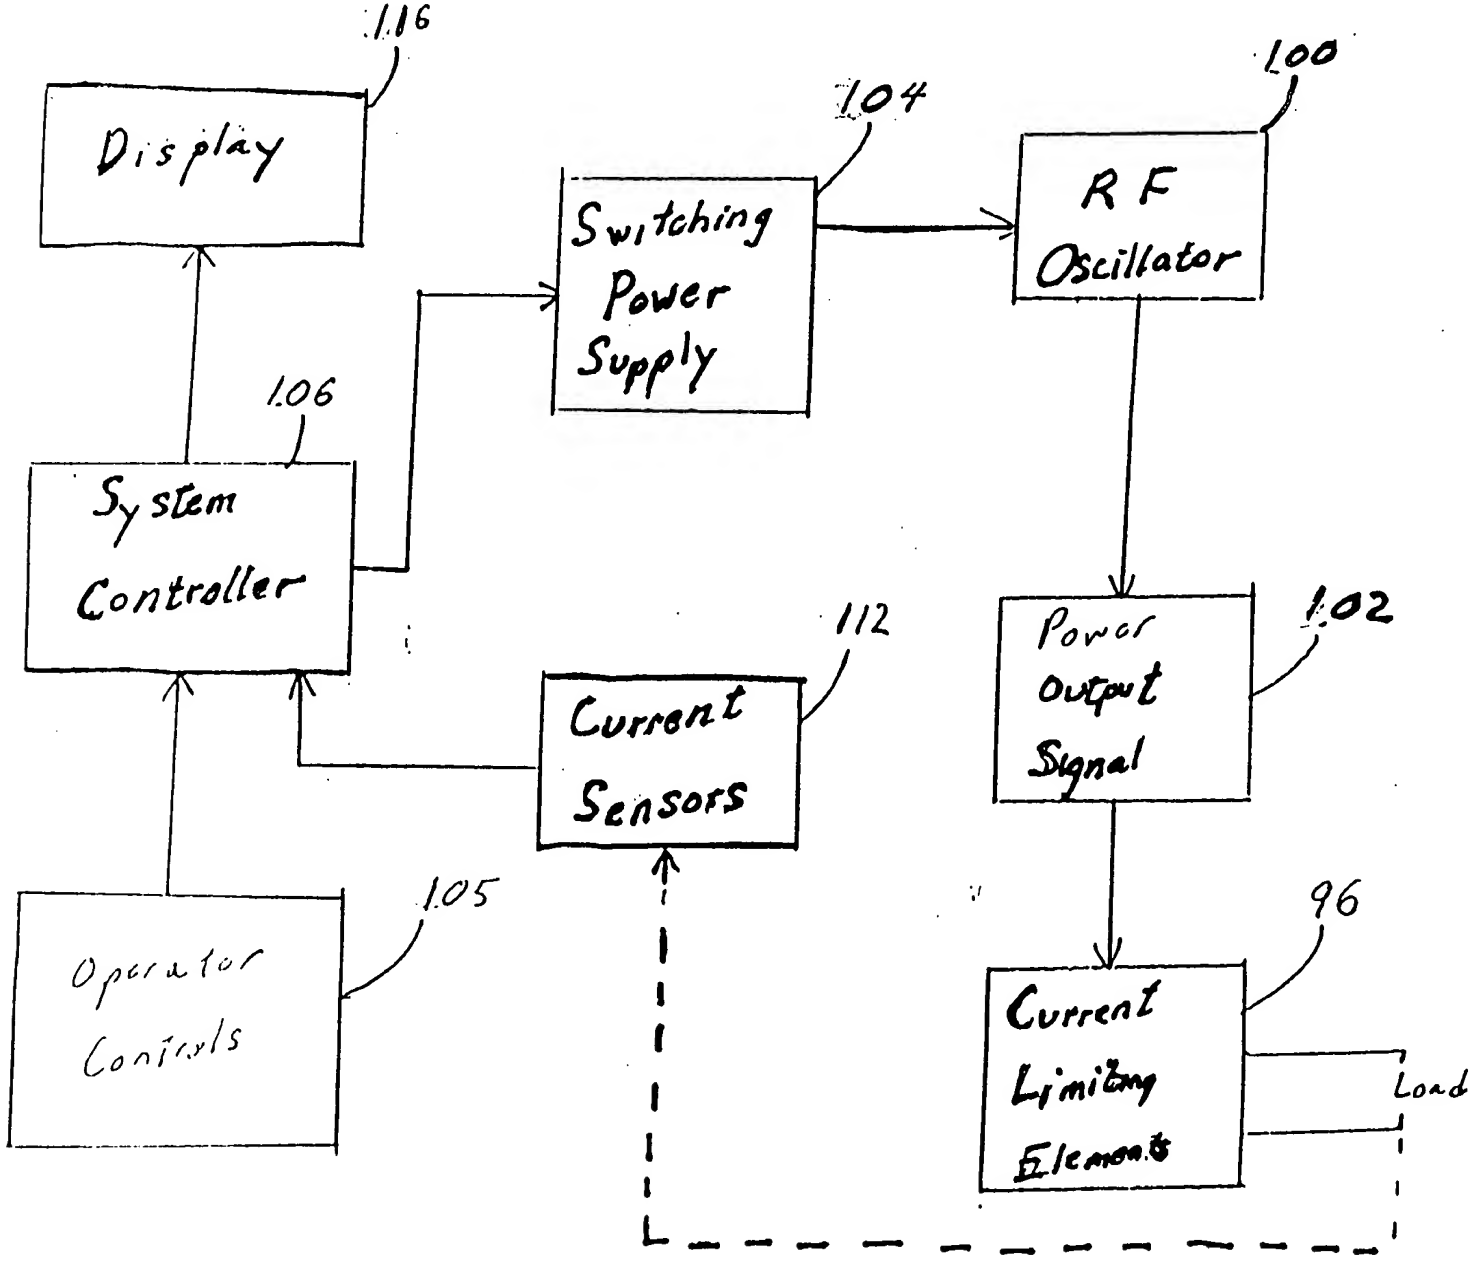
116
Display
104
Switching Power Supply
100
RF Oscillator
106
System Controller
112
Current Sensors
102
Power output Signal
105
Operator Controls
96
Current Limiting Elements
Load

FIG 2

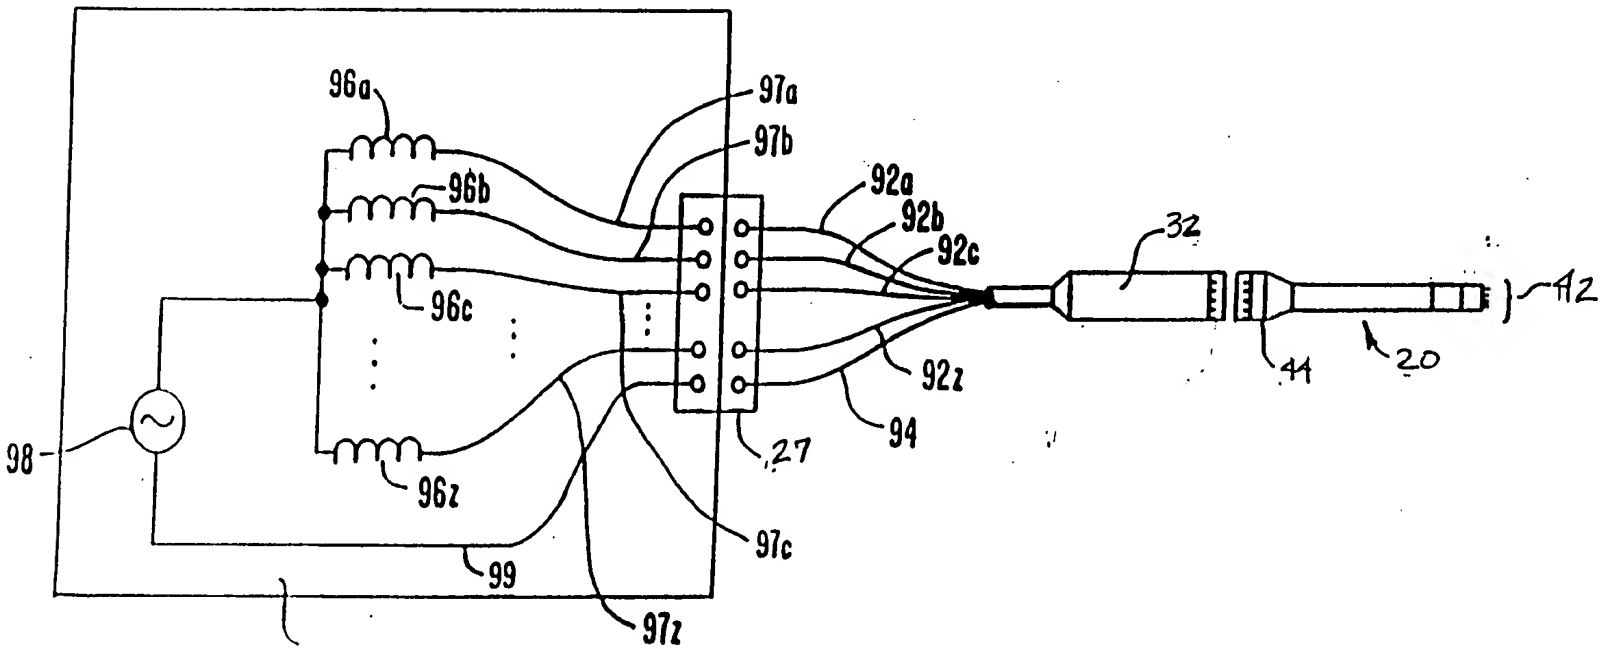
96a
96b
96c
96z
97a
97b
97c
97z
92a
92b
92c
92z
94
27
32
44
20
42
98
99

FIG. 3

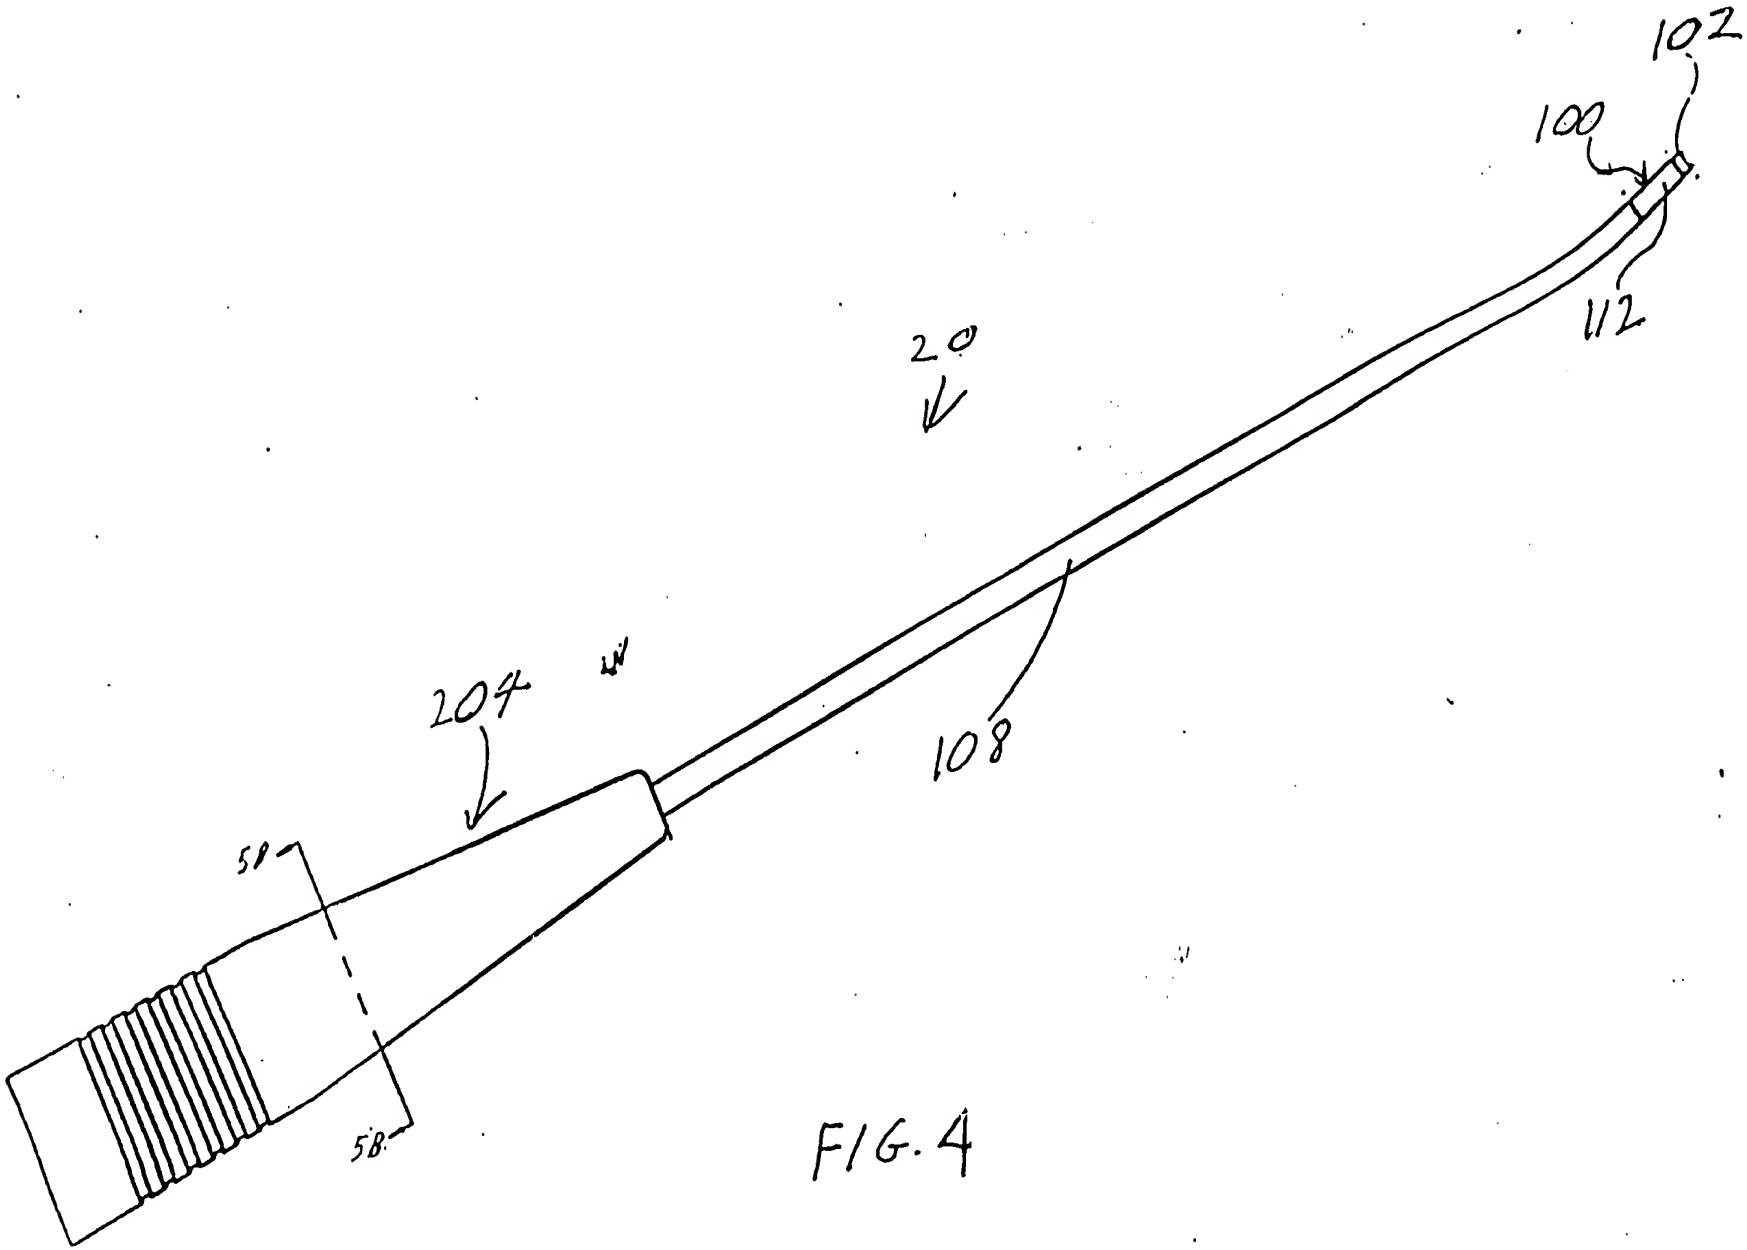

FIG. 4

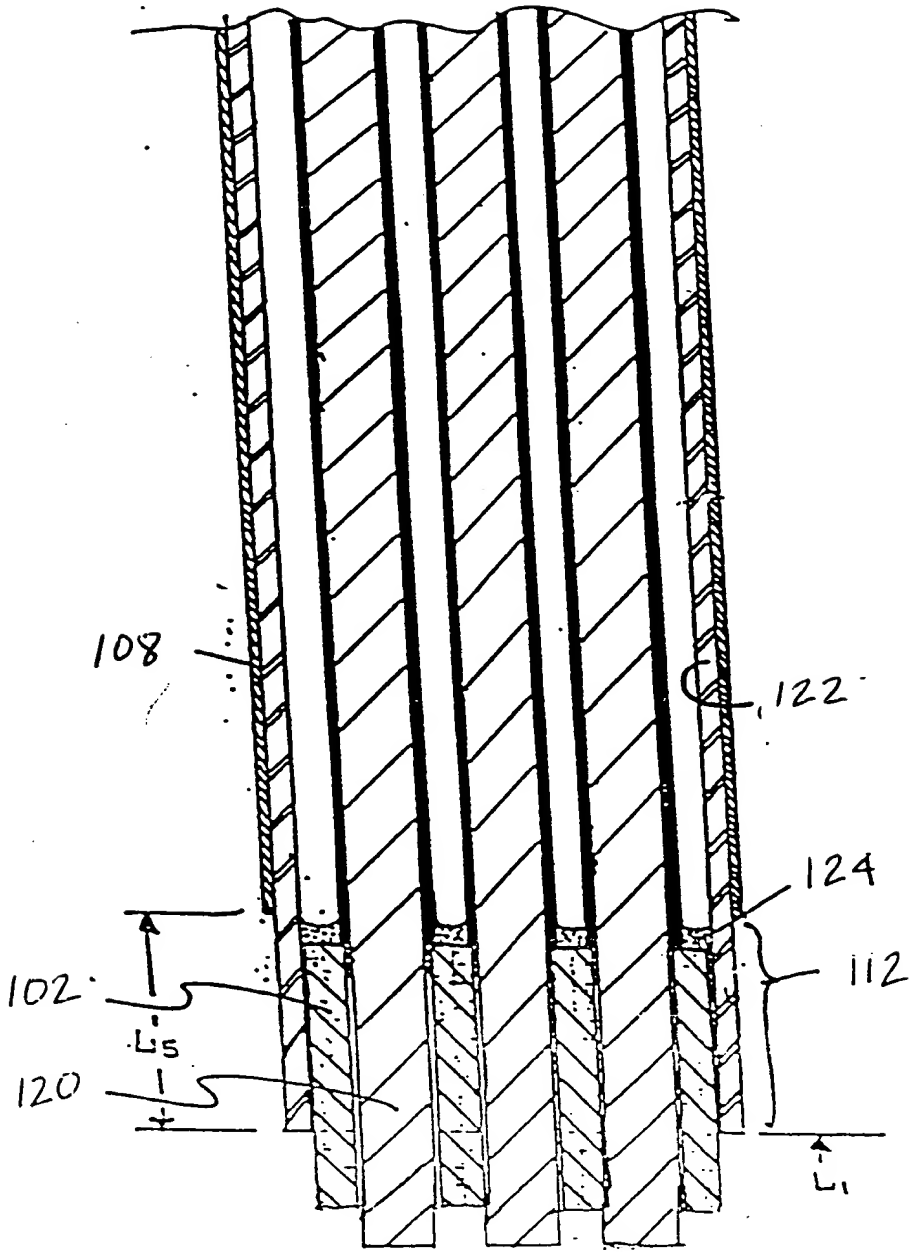

FIG. 5

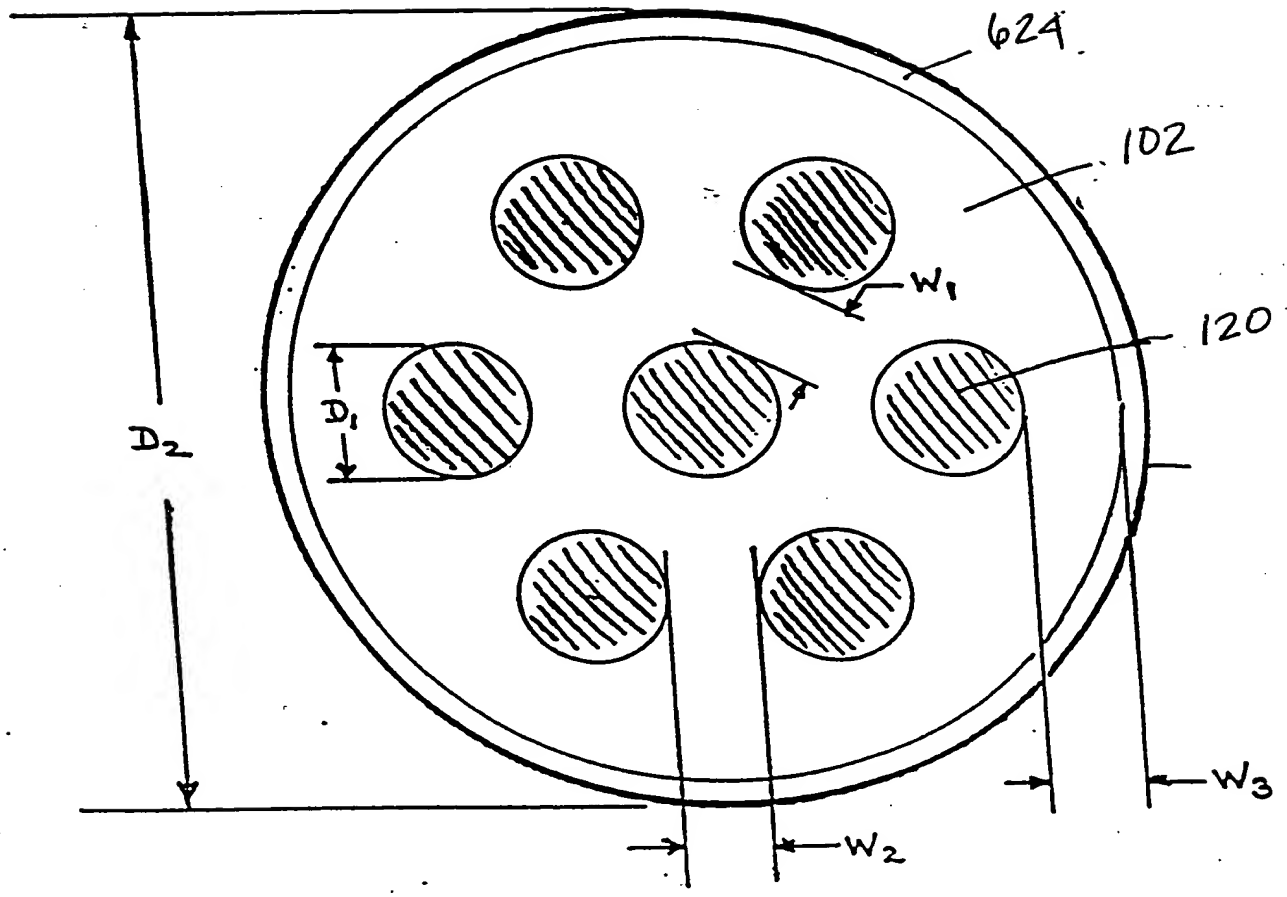

FIG. 6

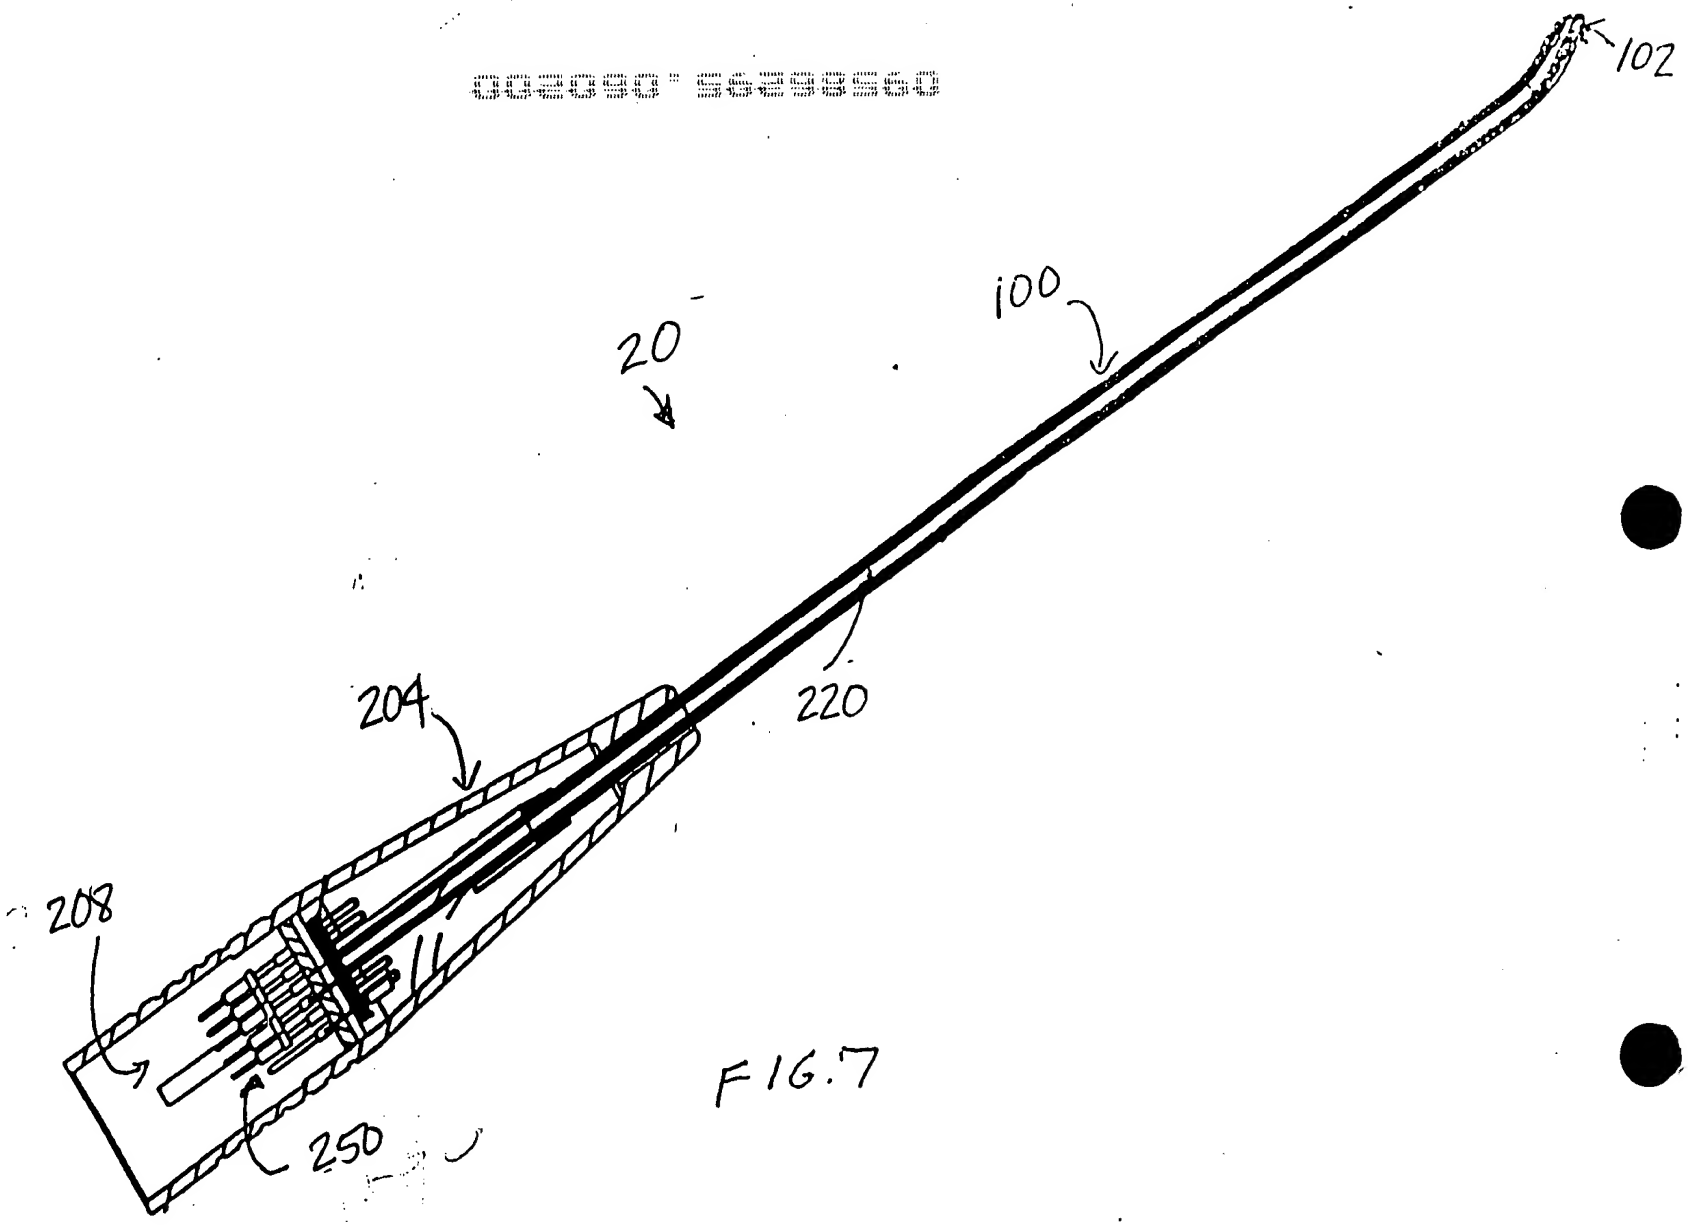

FIG.7

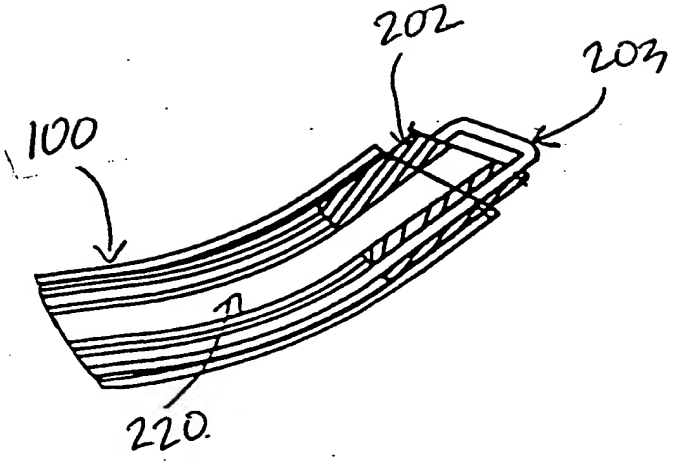

FIG. 8

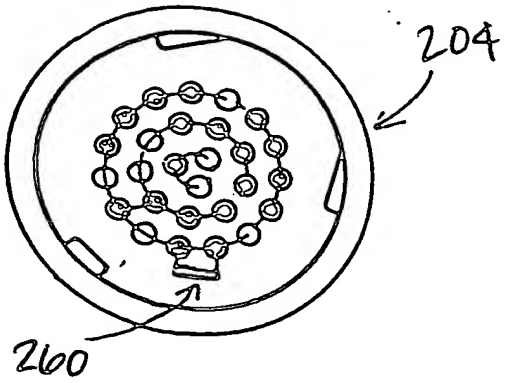

FIG. 9

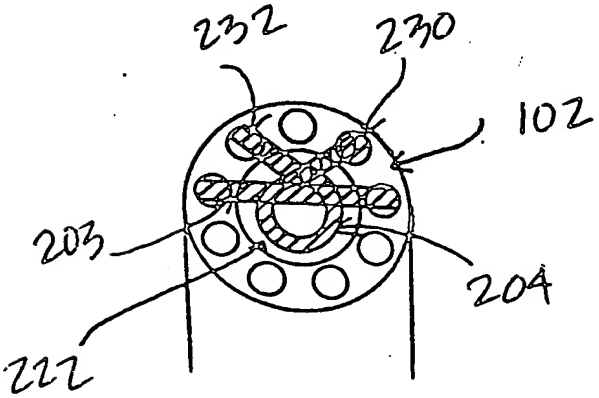

FIG. 10

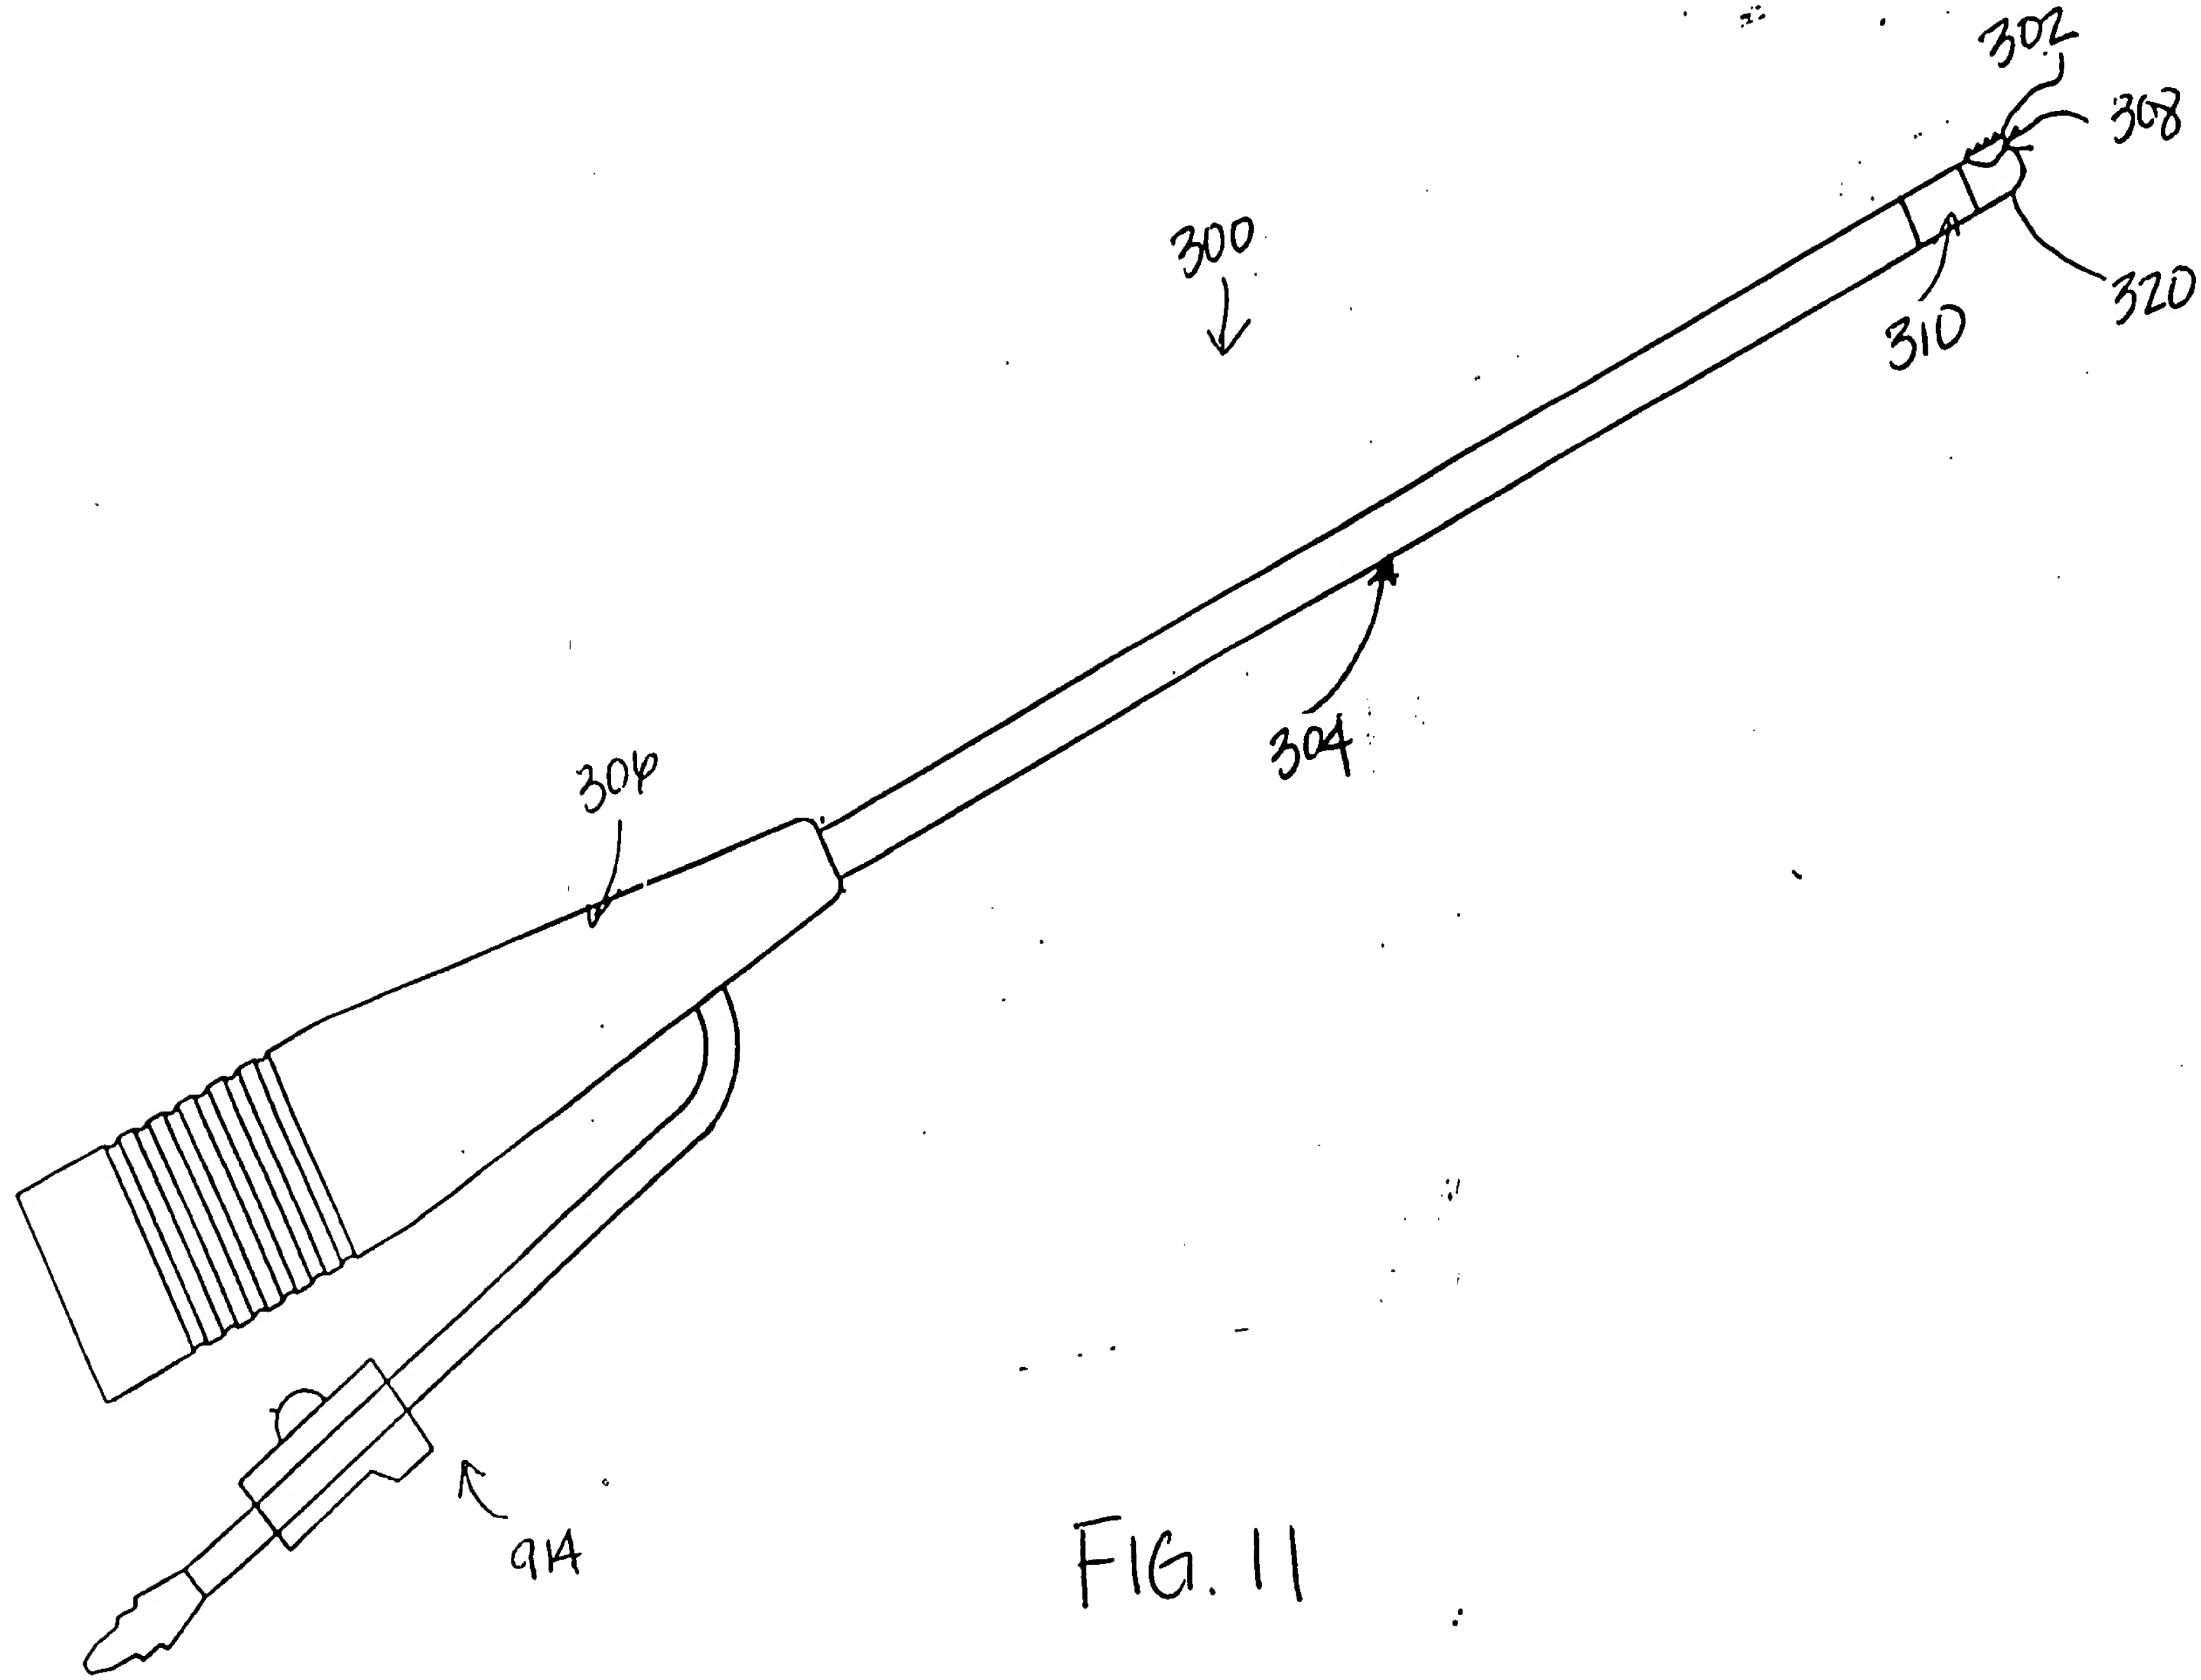

FIG. 11

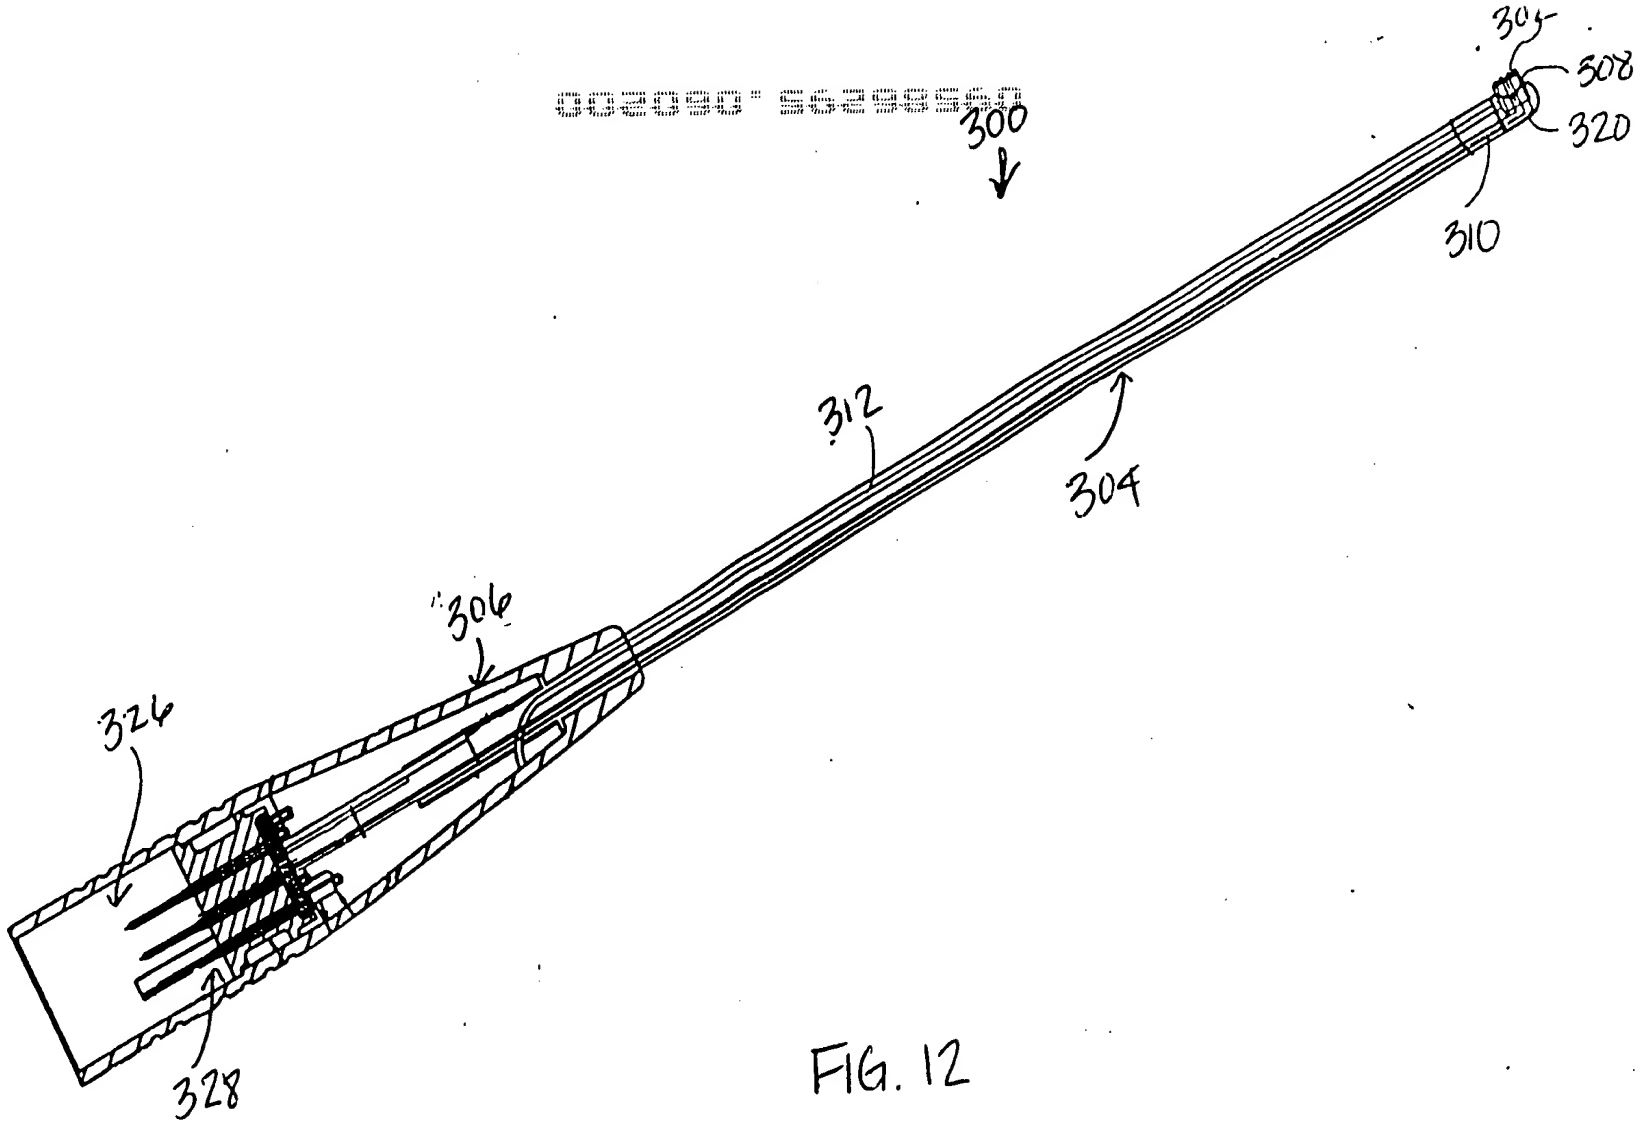

FIG. 12

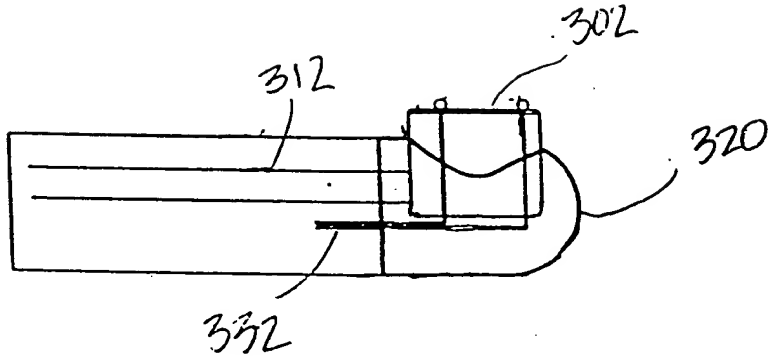

FIG. 13

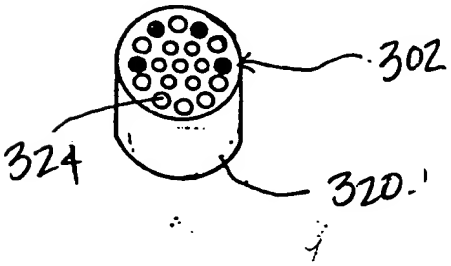

FIG. 14

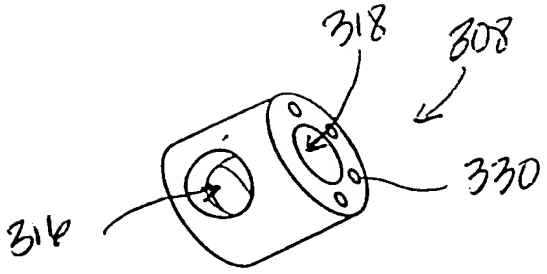

FIG. 15

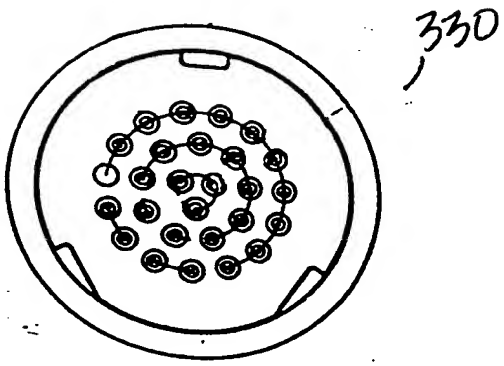

FIG. 16

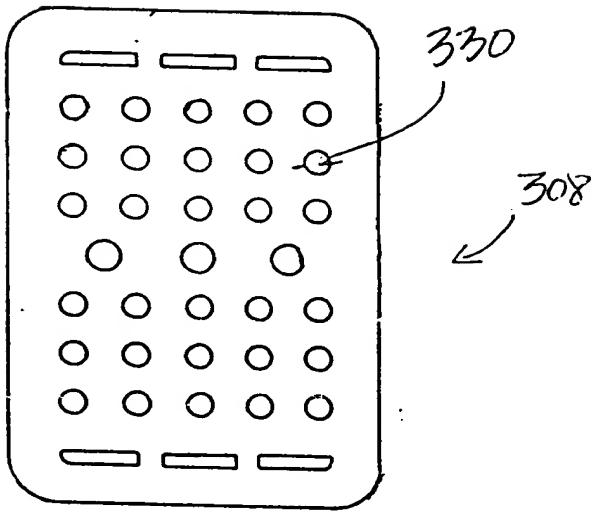

FIG. 17

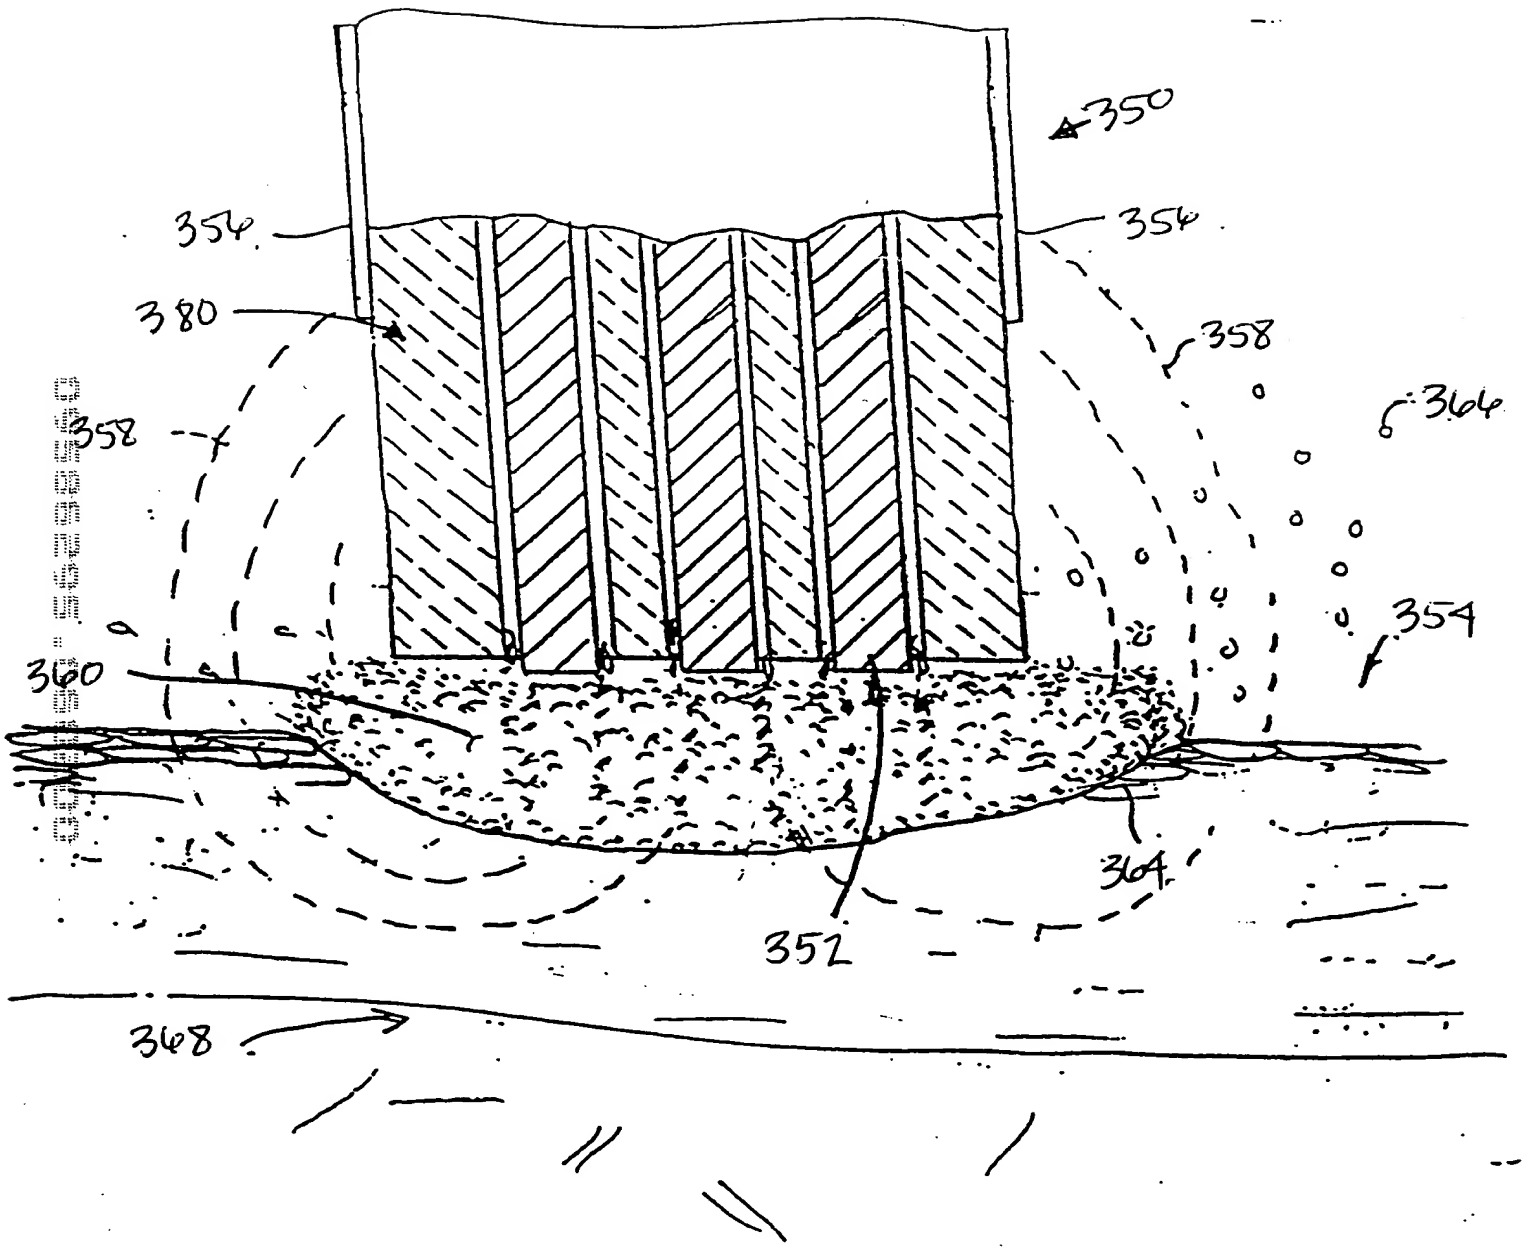

FIG. 18

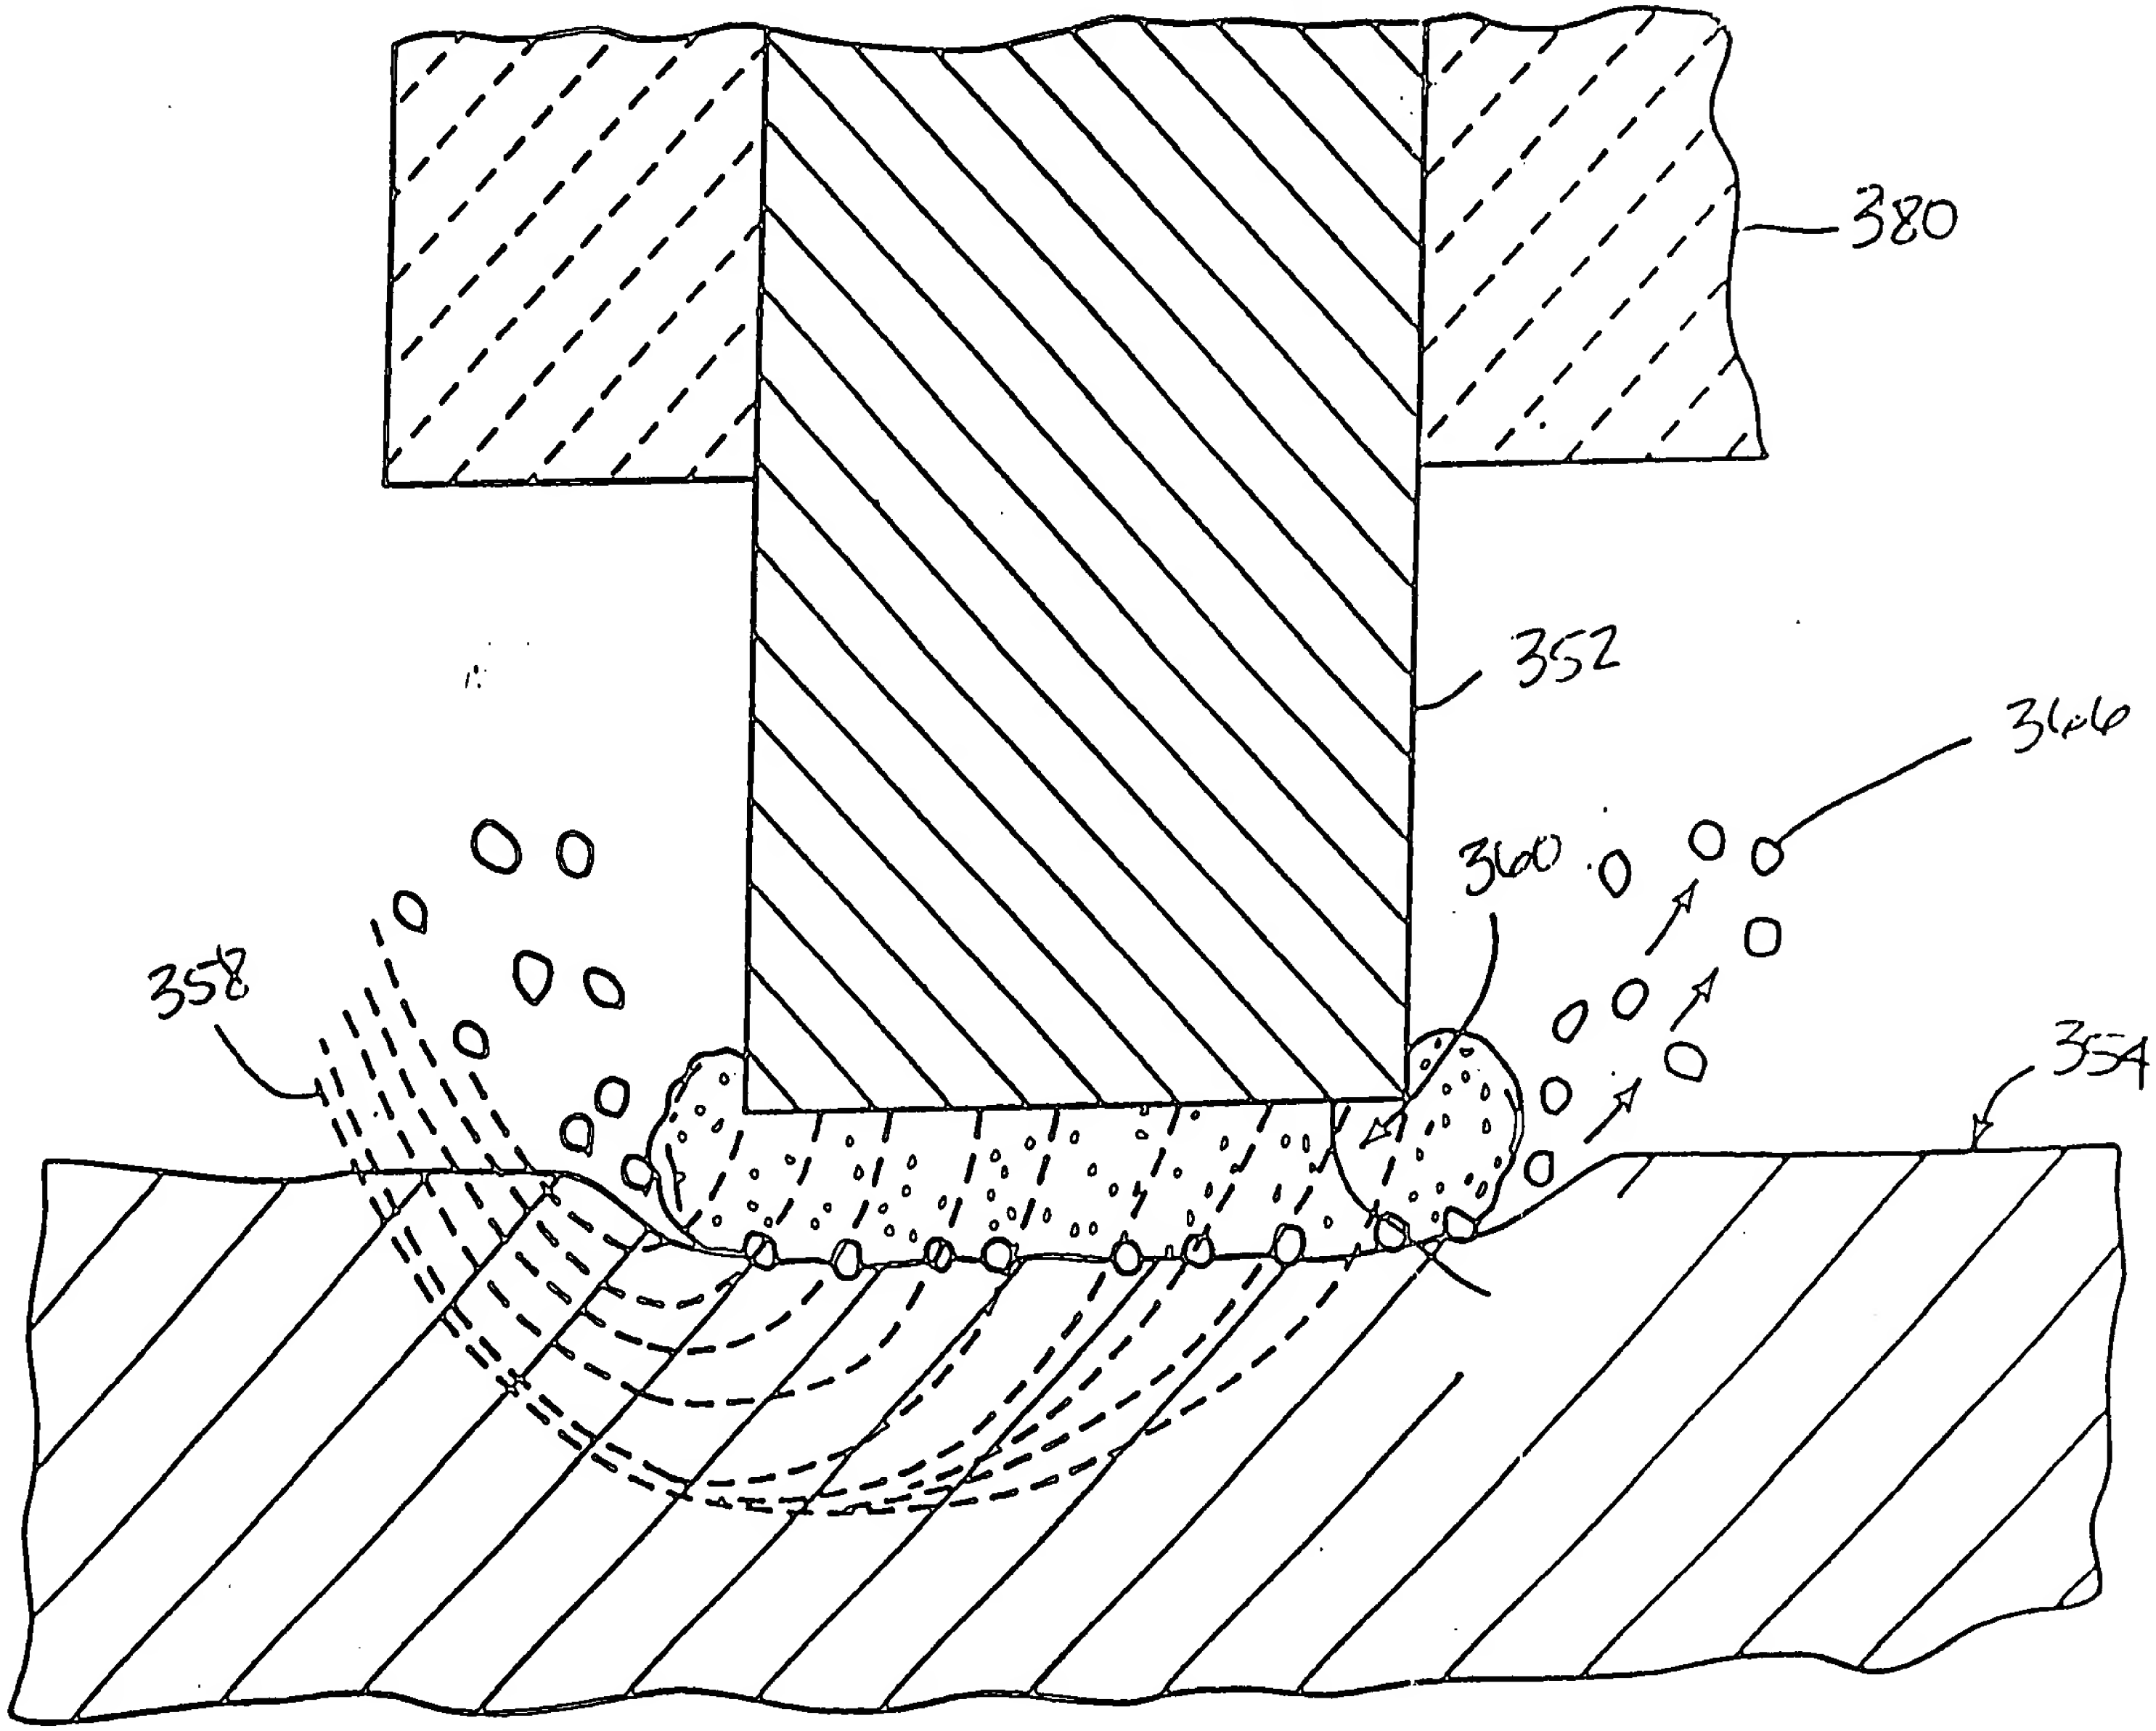

FIG. 19

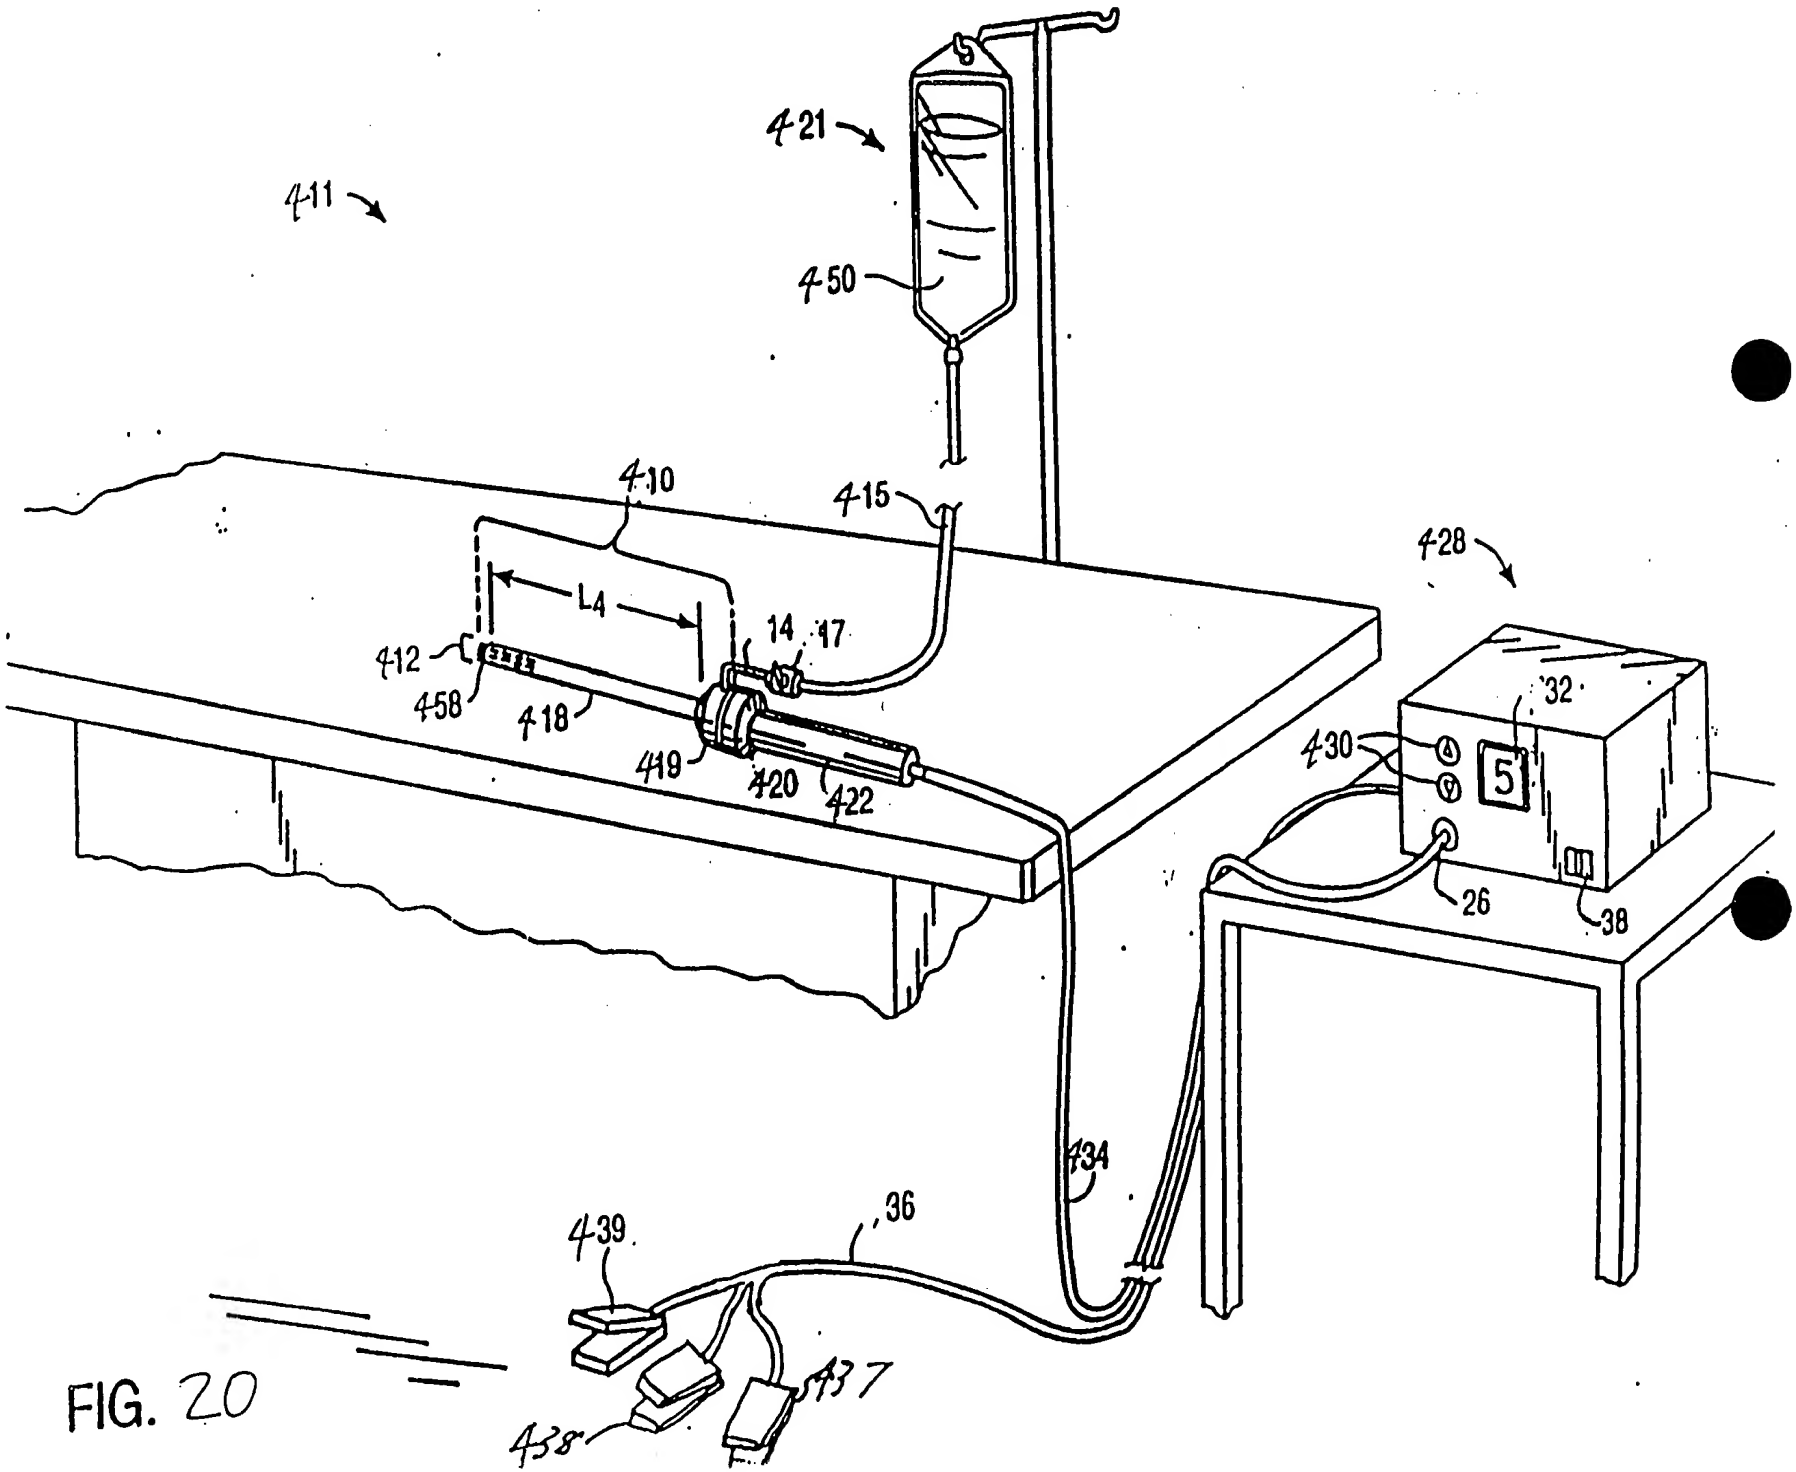

FIG. 20

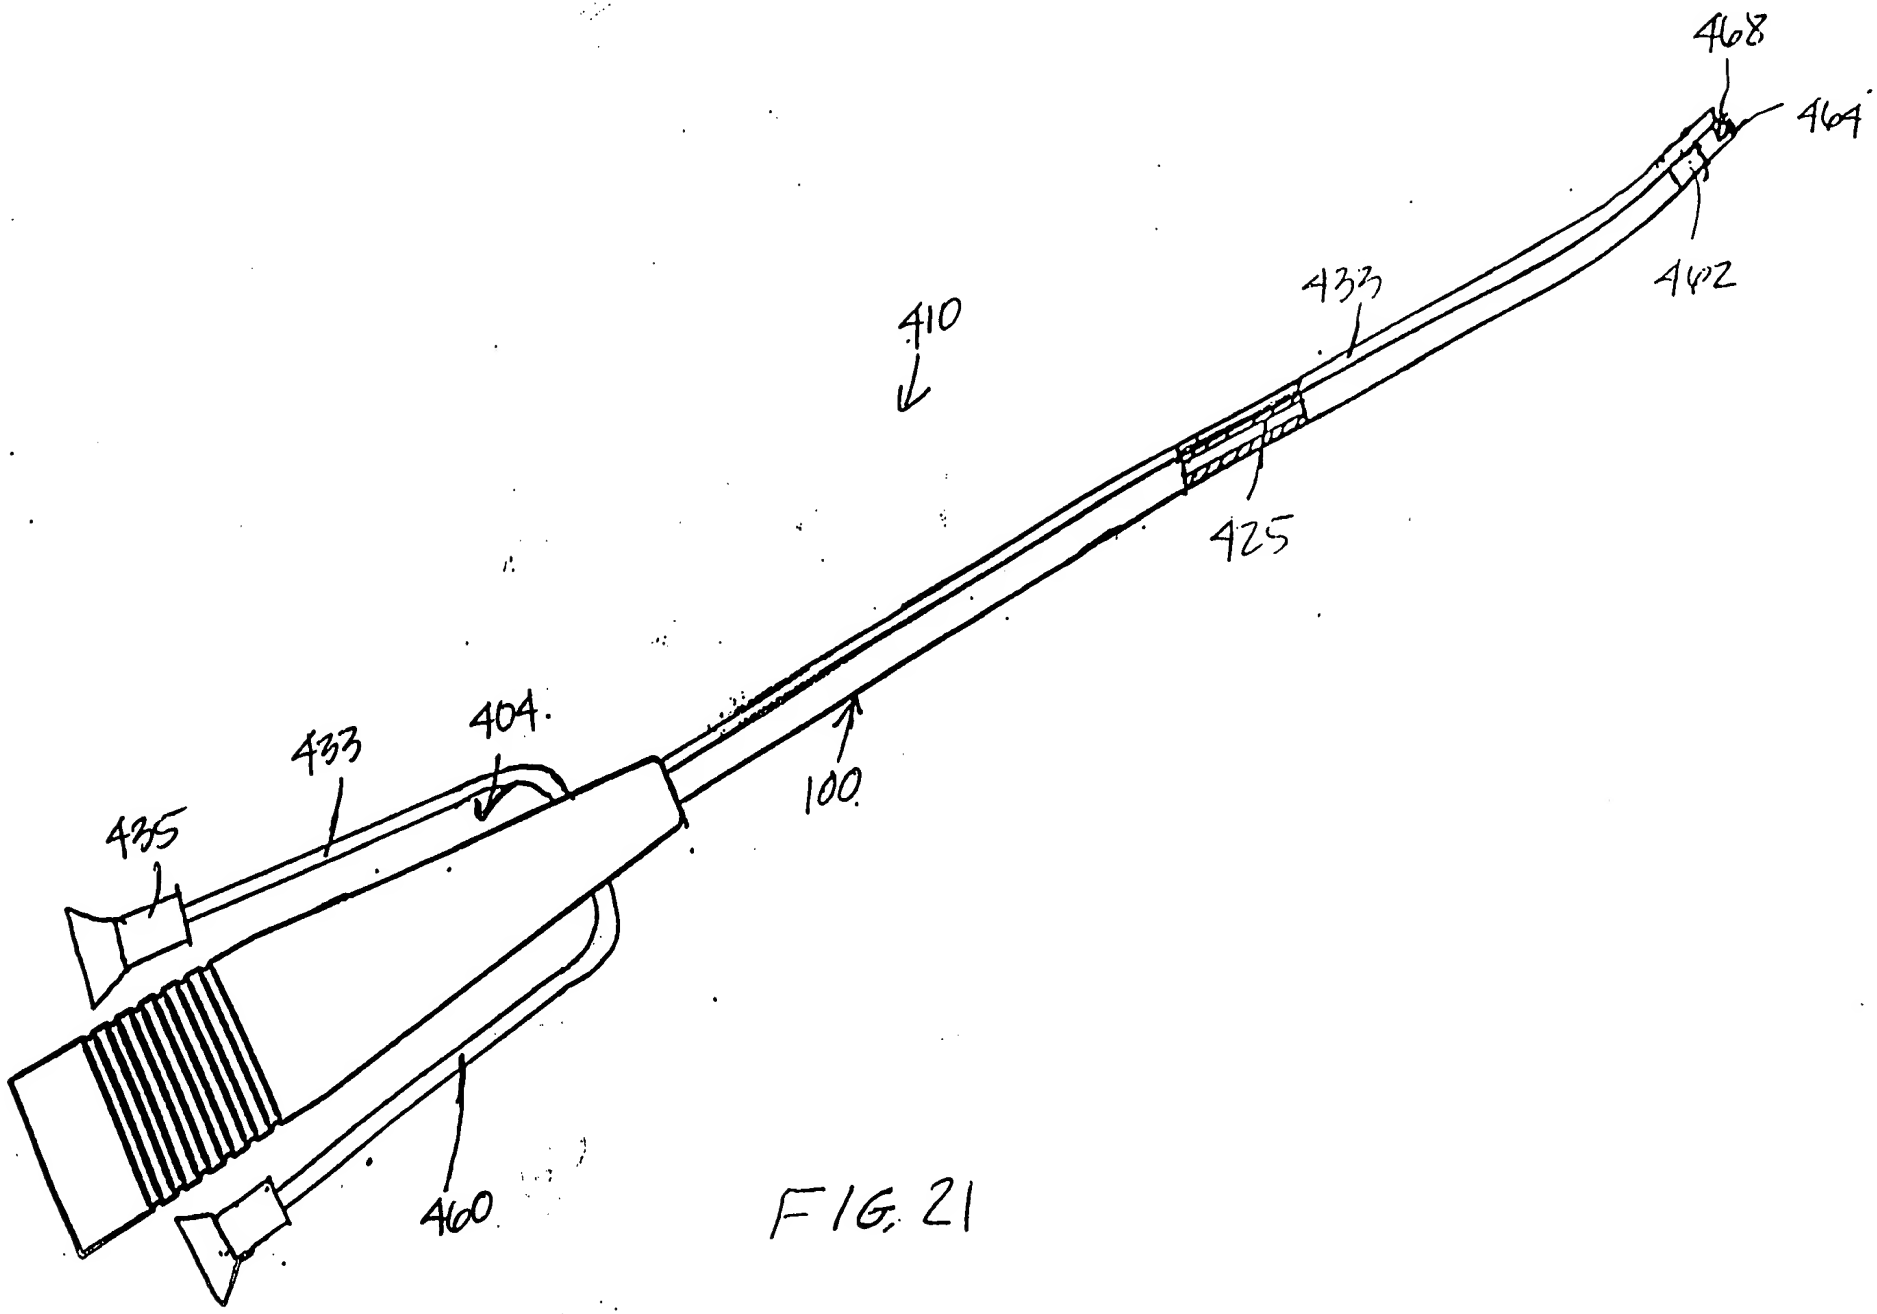

FIG. 21

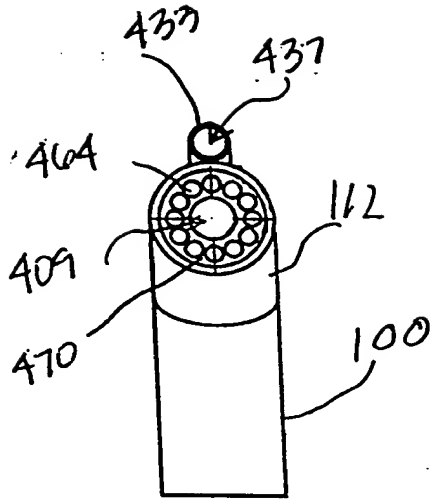

FIG. 22

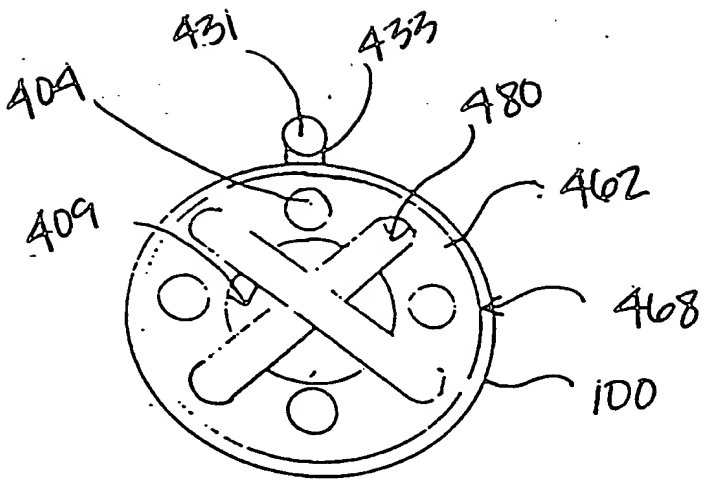

FIG. 23

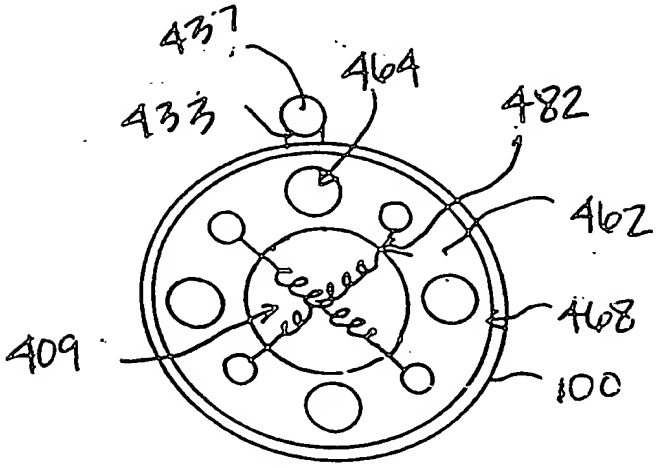

FIG. 24

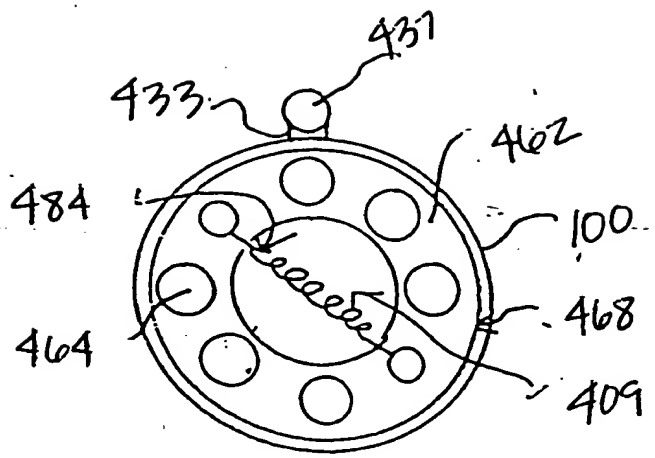

FIG. 25

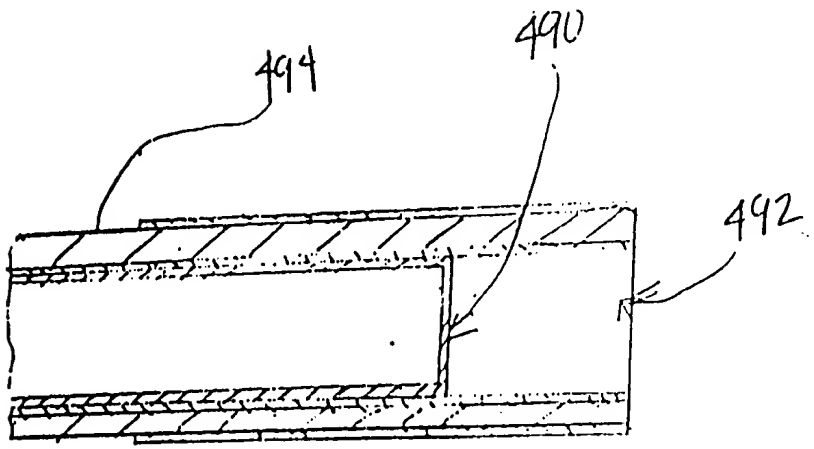

FIG. 26

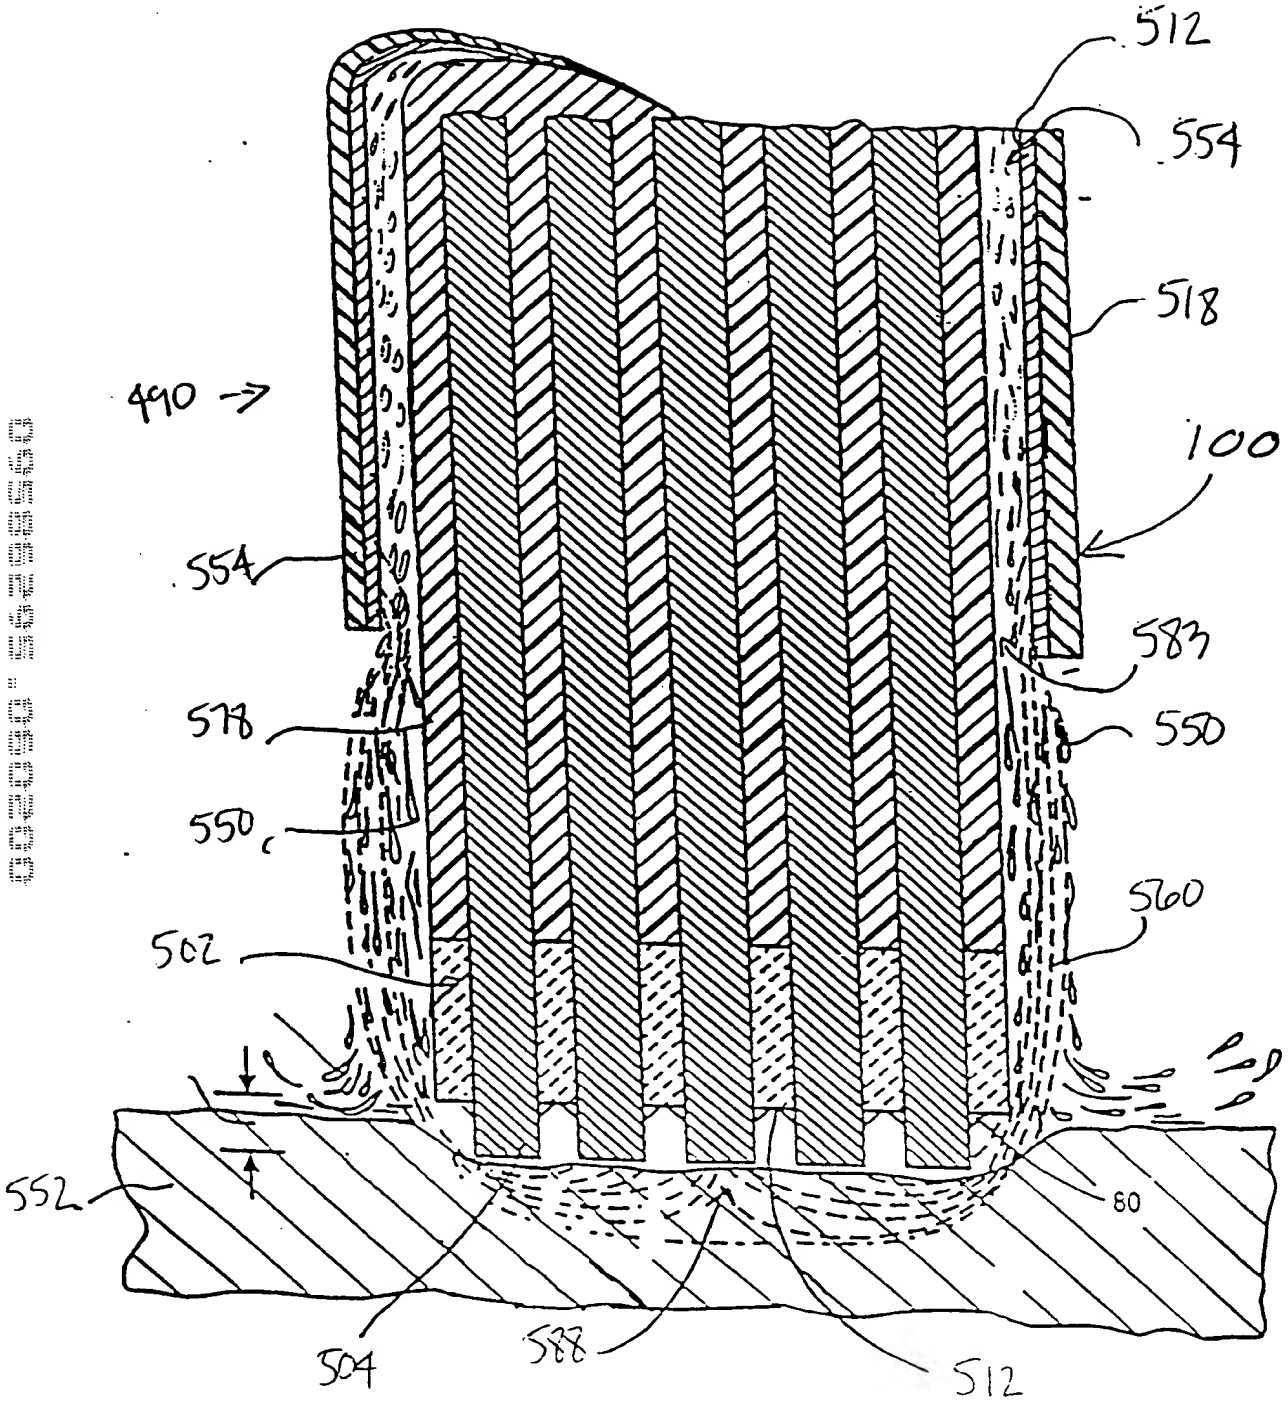
512
554
518
490
100
554
583
578
550
550
560
502
552
80
504
588
512

FIG. 17A

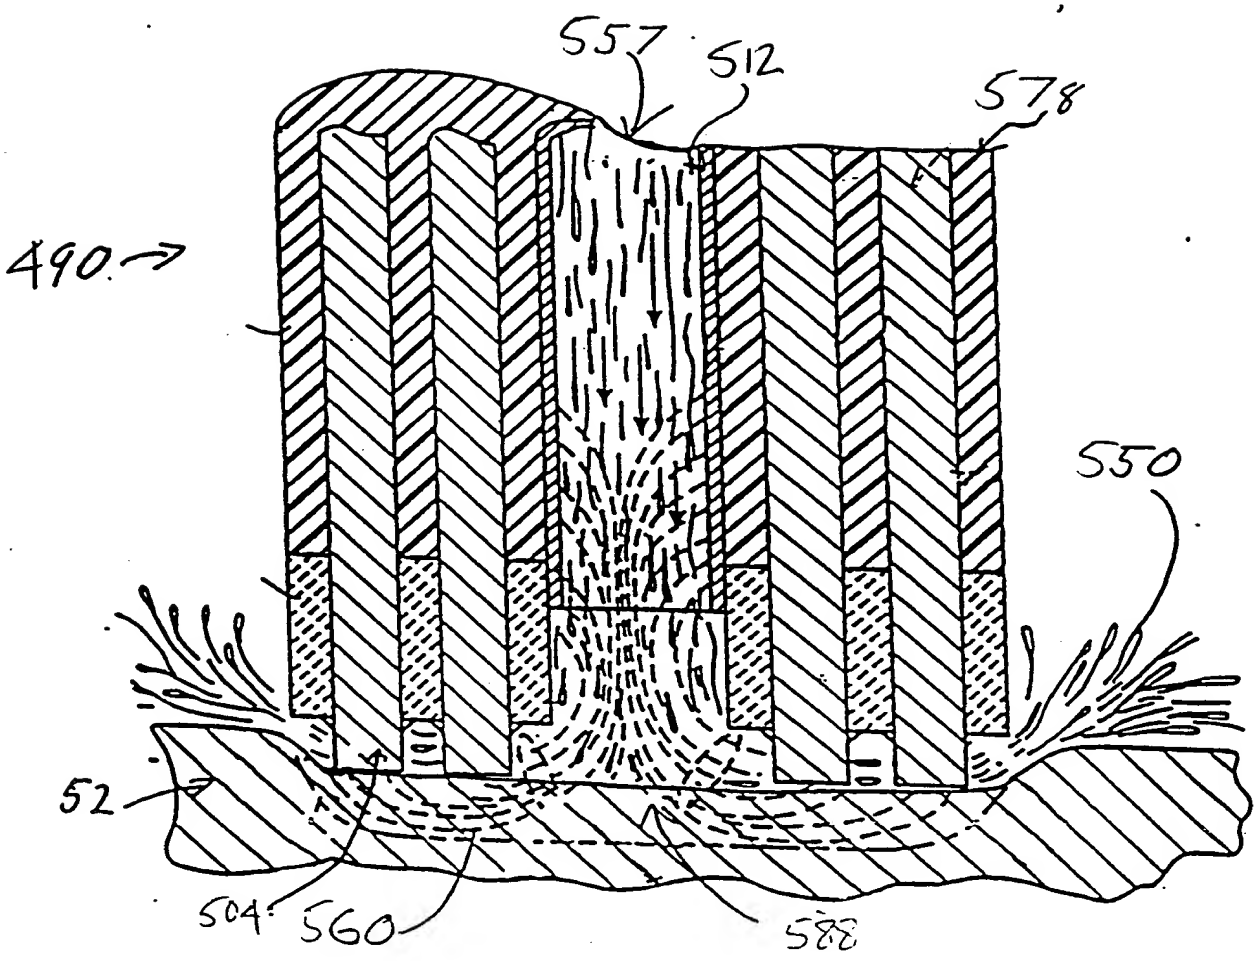

FIG. 27B

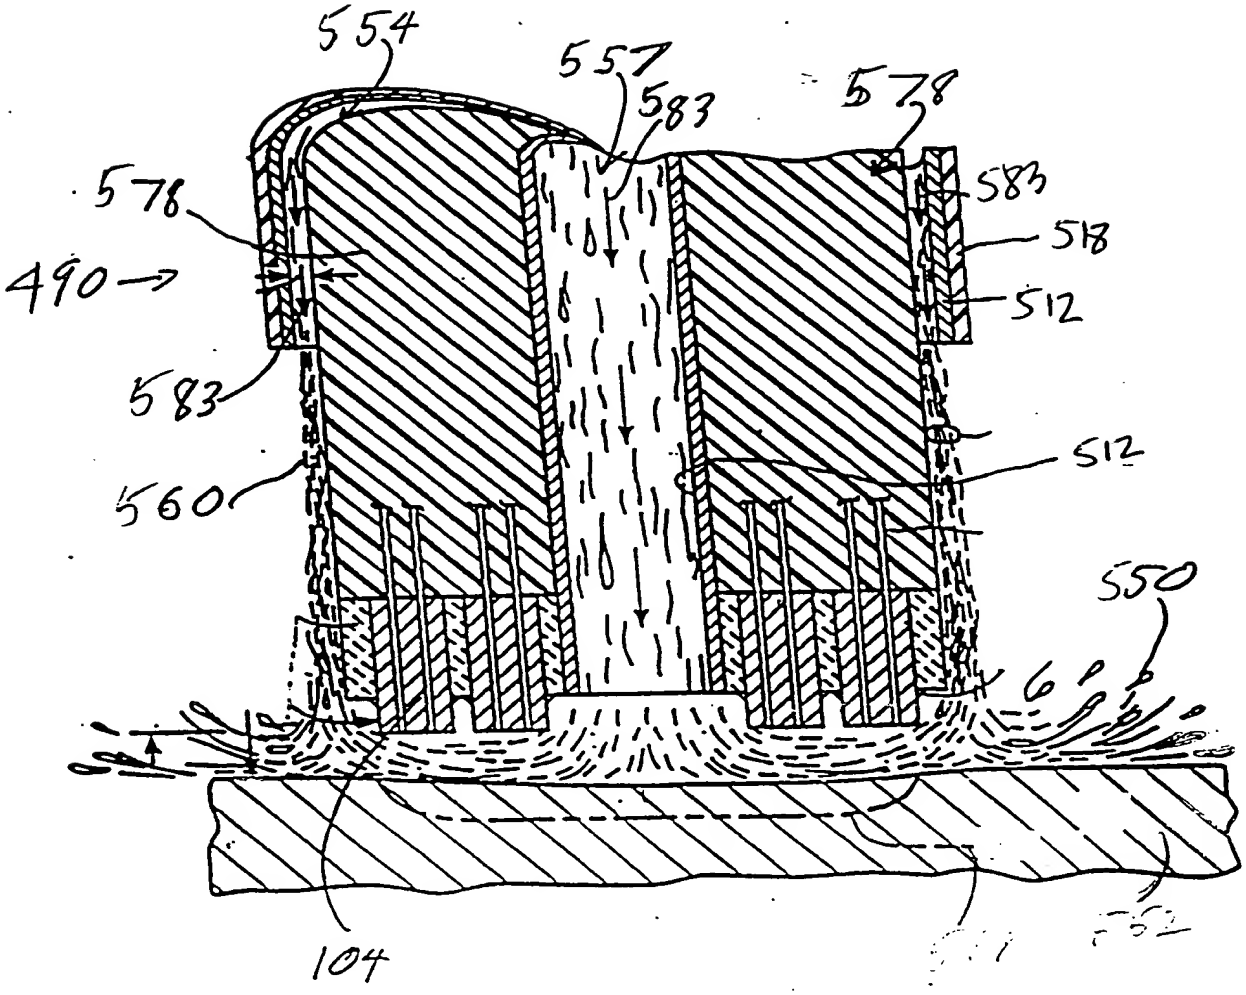

FIG 27C

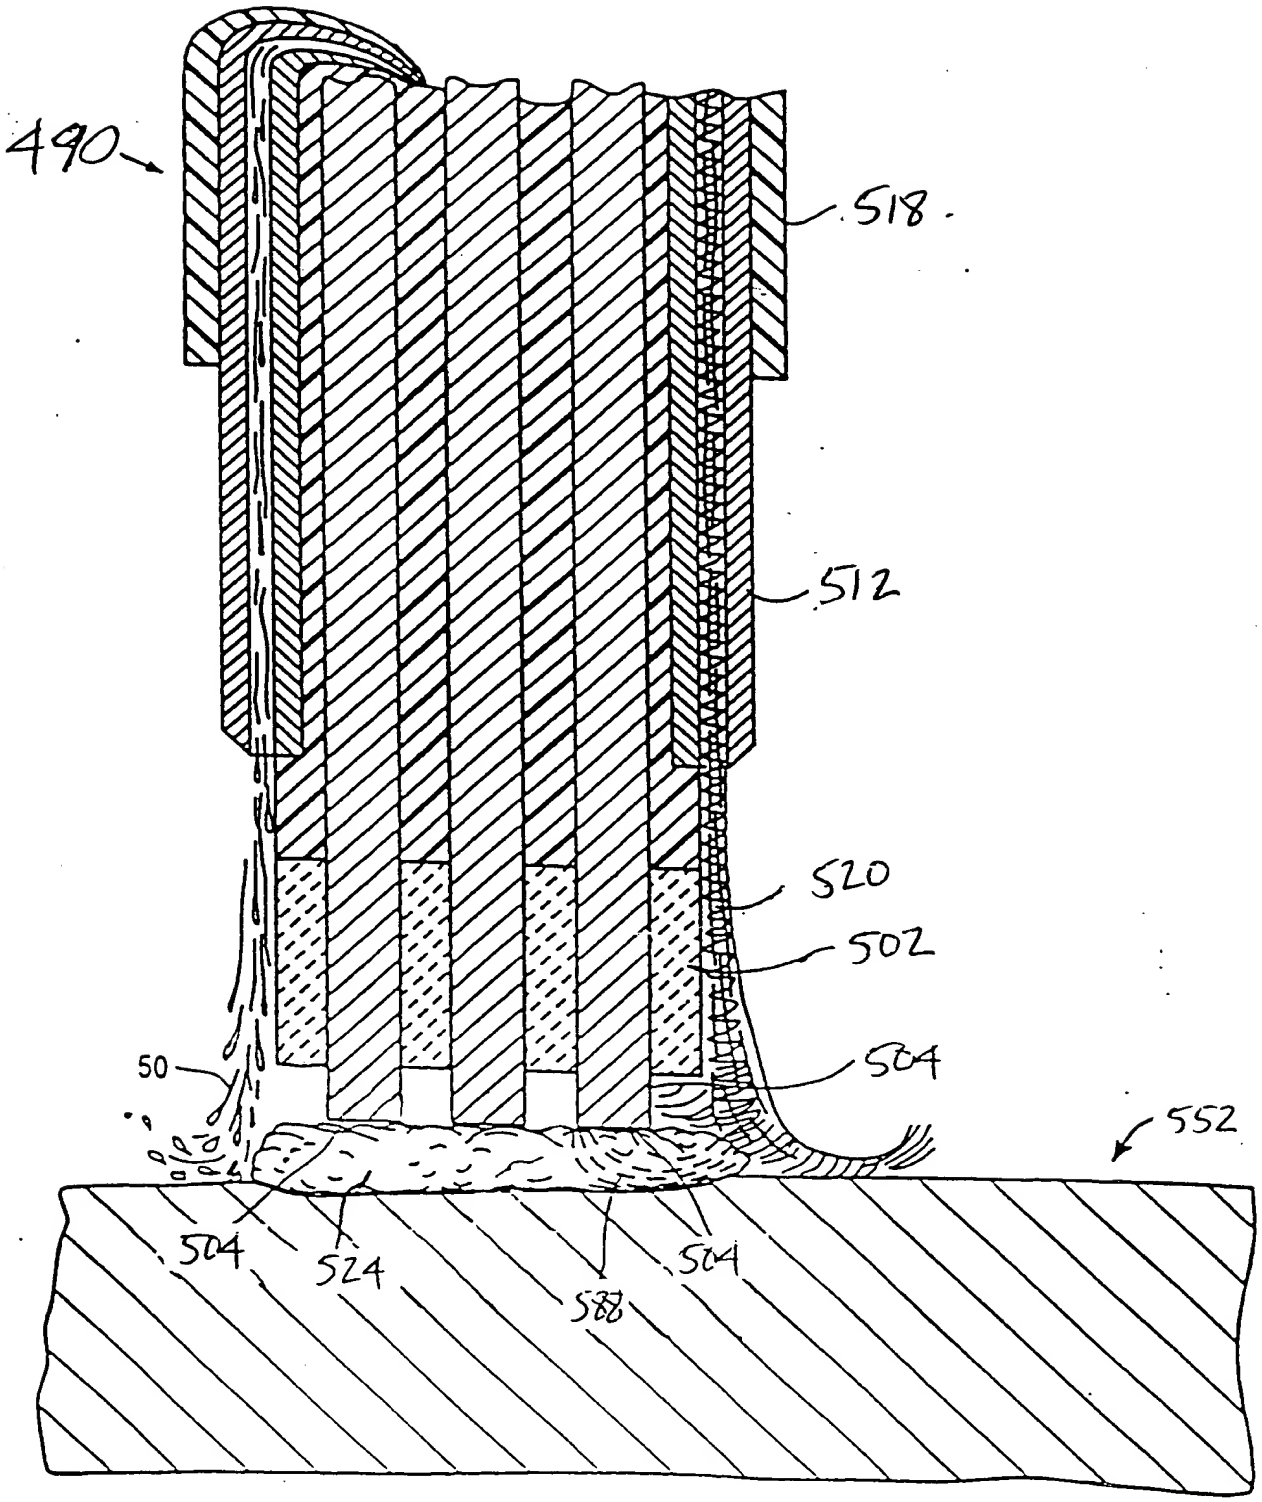

FIG. 2E

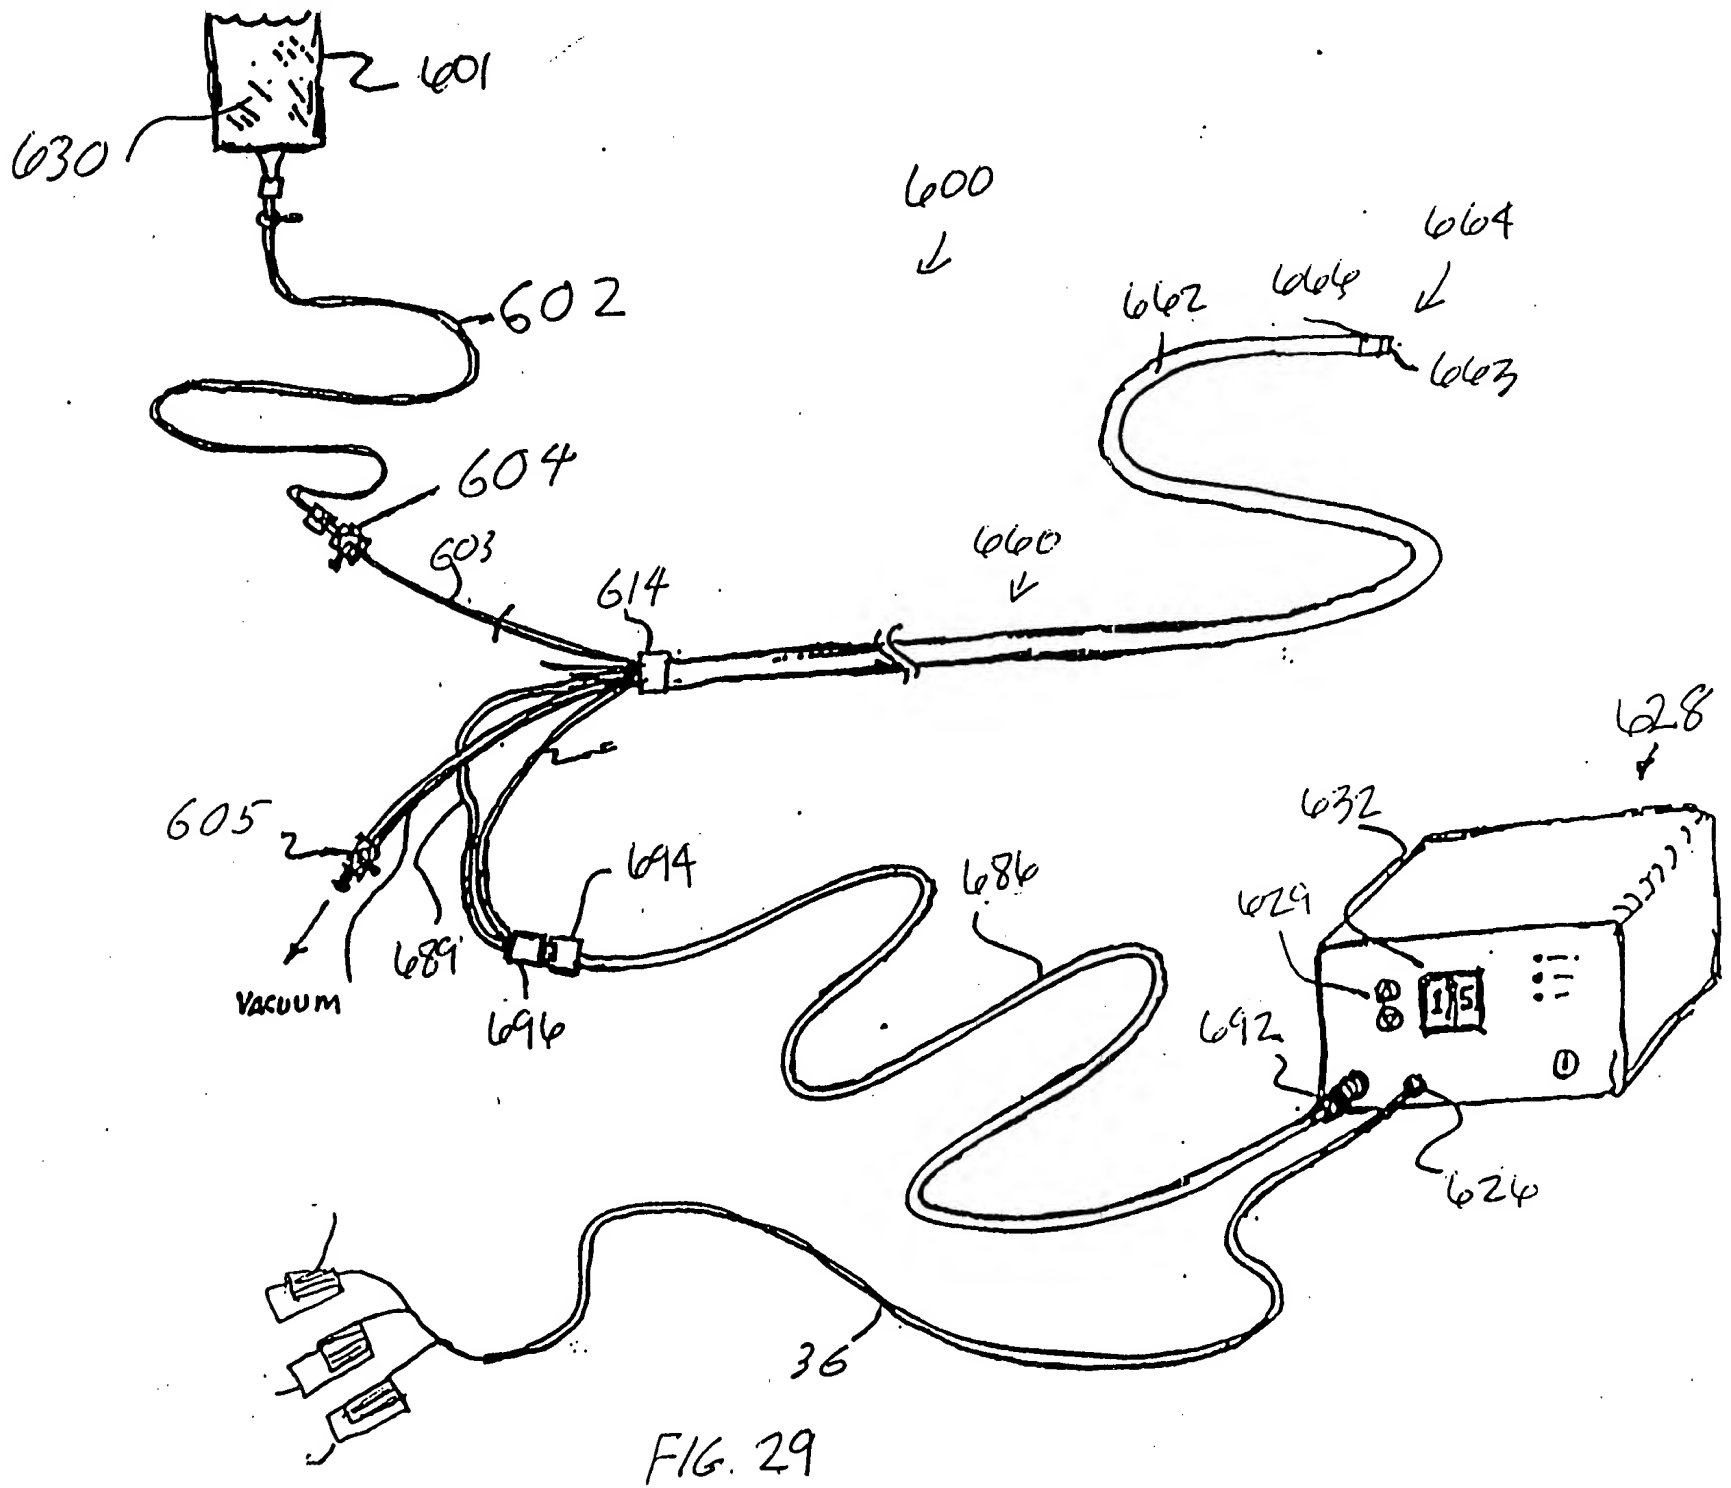
601
630
600
602
6064
6062
6066
6063
604
603
614
6060
628
605
632
694
686
629
689
VACUUM
696
692
624
36

FIG. 29

BOILING POINT OF WATER AT VARIOUS PRESSURES

Data based on the equation of state recommended by the International Association for the Properties of Steam in 1984, as presented in Haar, Gallagher, and Kell, "NBS-NRC Steam Tables" (Hemisphere Publishing Corp., New York, 1984). The temperature scale is IPTS-68.

Note that: 1 mbar = 100 Pa = 0.000986923 atmos = 0.750062 mmHg.

P/mbar	*T*/°C	*P*/mbar	*T*/°C	*P*/mbar	*T*/°C	*P*/mbar	*T*/°C
50	32.88	915	97.17	1013.25	100.00	1200	104.81
100	45.82	920	97.32	1015	100.05	1250	105.99
150	53.98	925	97.47	1020	100.19	1300	107.14
200	60.07	930	97.62	1025	100.32	1350	108.25
250	64.98	935	97.76	1030	100.46	1400	109.32
300	69.11	940	97.91	1035	100.60	1450	110.36
350	72.70	945	98.06	1040	100.73	1500	111.38
400	75.88	950	98.21	1045	100.87	1550	112.37
450	78.74	955	98.35	1050	101.00	1600	113.33
500	81.34	960	98.50	1055	101.14	1650	114.26
550	83.73	965	98.64	1060	101.27	1700	115.18
600	85.95	970	98.78	1065	101.40	1750	116.07
650	88.02	975	98.93	1070	101.54	1800	116.94
700	89.96	980	99.07	1075	101.67	1850	117.79
750	91.78	985	99.21	1080	101.80	1900	118.63
800	93.51	990	99.35	1085	101.93	1950	119.44
850	95.15	995	99.49	1090	102.06	2000	120.24
900	96.71	1000	99.63	1095	102.19	2050	121.02
905	96.87	1005	99.77	1100	102.32	2100	121.79
910	97.02	1010	99.91	1150	103.59	2150	122.54

FIG. 30

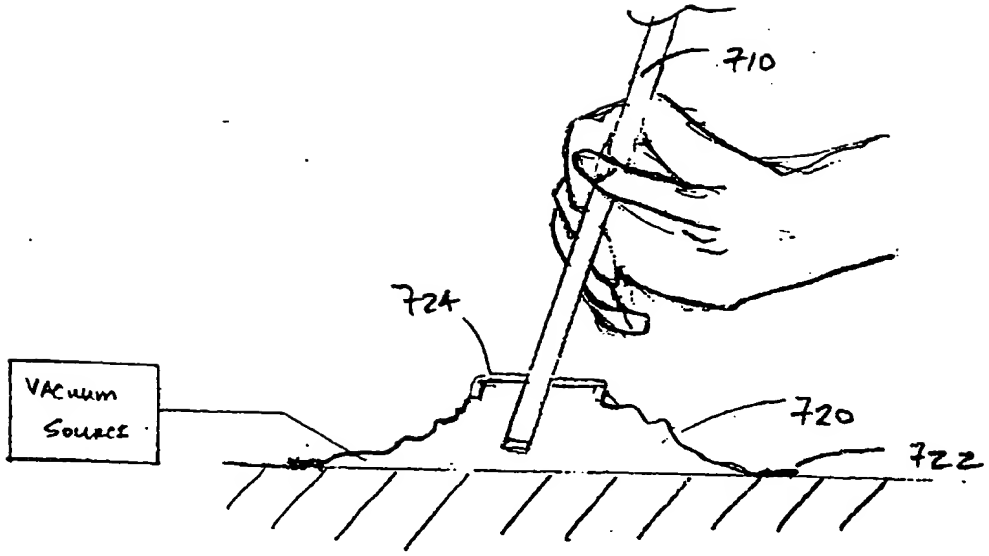

FIG_31

Element	Compound	Concentration	Color
Sodium Chloride	NaCl	0.1 mol dm3	Orange-yellow
Barium Chloride	BaCl2	0.2 mol dm3	Pale green
Strontium Chloride	SrCl2	0.2 mol dm3	Bright red
Potassium Chloride	KCl		Blue – Purple
Potassium Nitrate	KNO3		Violet
Copper Chloride	CuCl2	0.2 mol dm3	Bright green-blue
Calcium Chloride	CaCl2	0.2 mol dm3	Dull orange-red
Caesium Chloride	CsCl	0.2 mol dm3	Pale lilac
Lithium Chloride	LiCl	0.2 mol dm3	Bright pink-red

Fig- 32

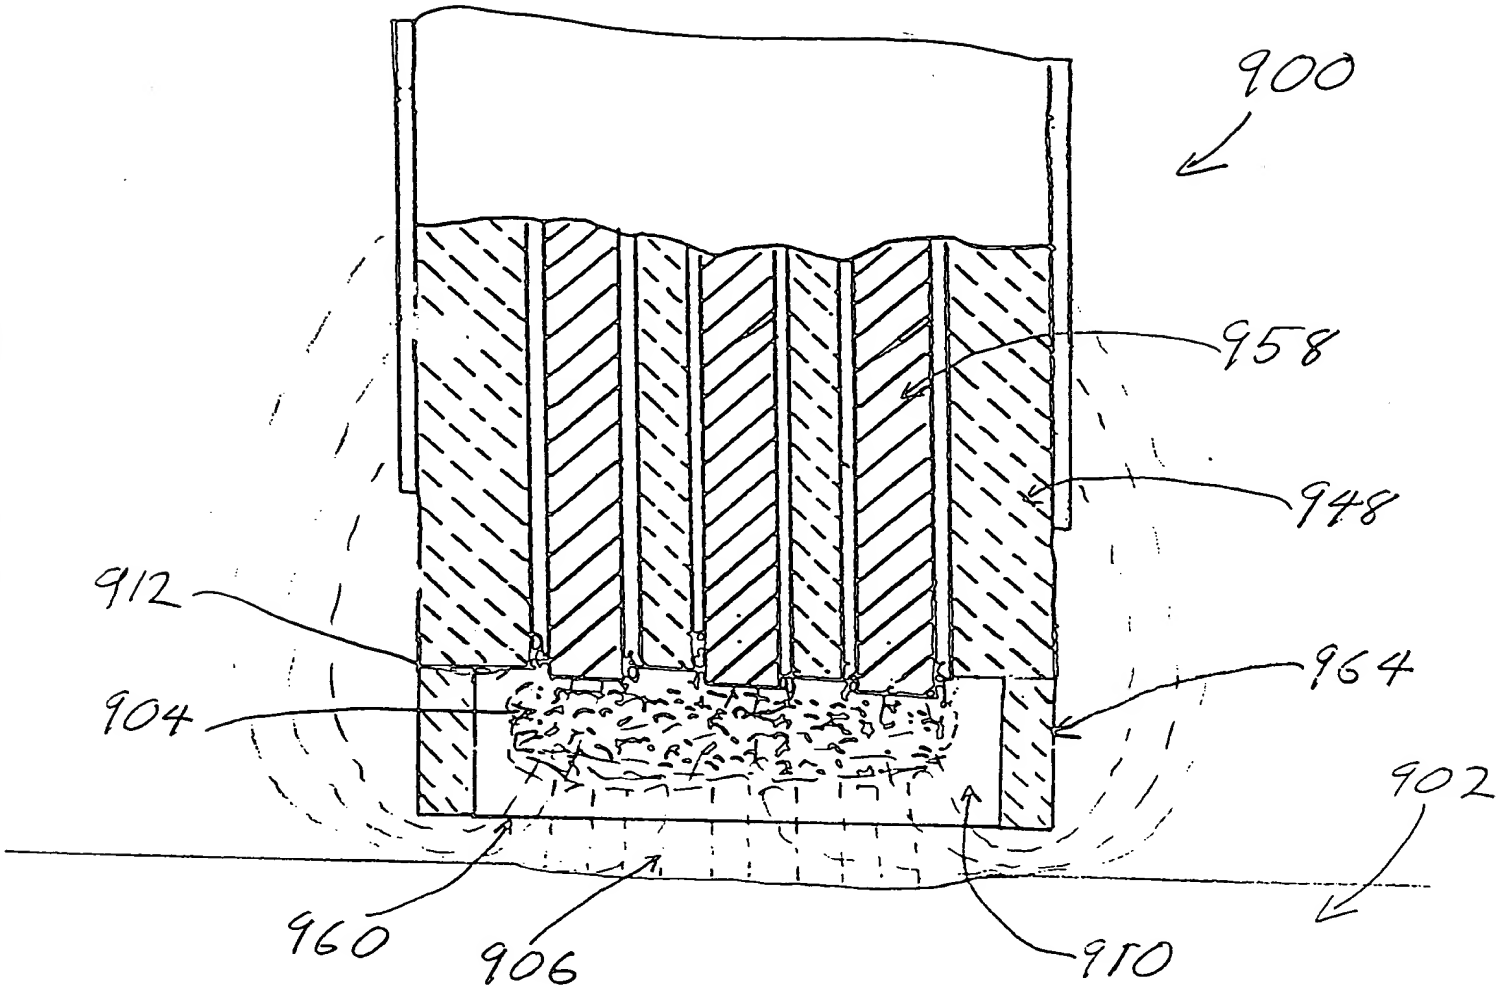

FIG 33